

FORM PTO-1390 (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 450106-02804
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) 097/869658
INTERNATIONAL APPLICATION NO. PCT/JP00/07549	INTERNATIONAL FILING DATE 27 OCTOBER 2000	PRIORITY DATE CLAIMED 29 OCTOBER 1999	
TITLE OF INVENTION STORAGE MEDIUM, INFORMATION PROCESSING APPARATUS, AND METHOD			
APPLICANT(S) FOR DO/EO/US Takeshi IWATSU			

Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
- ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
- ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
- ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - ☐ is attached hereto (required only if not communicated by the International Bureau).
 - ☒ has been communicated by the International Bureau.
 - ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - ☐ are attached hereto (required only if not communicated by the International Bureau).
 - ☒ have been communicated by the International Bureau.
 - ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - ☐ have not been made and will not be made.
- ☐ A English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

- ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
- ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
- ☐ A **FIRST** preliminary amendment.
- ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
- ☐ A substitute specification.
- ☐ A change of power of attorney and/or address letter.
- ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
- ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
- ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
- ☒ Other items or information:
PCT/RO/101, PCT/ISA/210
23 Sheets of Drawings, 2 Page Abstract

EXPRESS MAIL

Mailing Label Number: **EL742692451US**

Date of Deposit: **June 27, 2001**


I hereby certify that this paper or fee is being deposited with the United States Postal Service

"Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents and Trademarks, Box PCT Washington, DC 20231.

Charles Jackson
(Typed or printed name of person mailing paper or fee)

Charles Jackson
(Signature of person mailing paper or fee)

U.S. APPLICATION NO. 09/869658 (if known, see 37 C.F.R. 1.50)		INTERNATIONAL APPLICATION NO. PCT/JP00/07549		ATTORNEY'S DOCKET NO. 450106-02804	
--	--	---	--	---------------------------------------	--

21. <input checked="" type="checkbox"/> The following fees are submitted				CALCULATIONS PTO USE ONLY																																																																															
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00 International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO\$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$710.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)\$100.00																																																																																			
ENTER APPROPRIATE BASIC FEE AMOUNT =																																																																																			
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 20%;">RATE</th> <th style="width: 20%;">\$</th> <th style="width: 20%;"></th> </tr> </thead> <tbody> <tr> <td>Total Claims</td> <td style="text-align: center;">22 - 20 =</td> <td style="text-align: center;">2</td> <td>x \$18.00</td> <td style="text-align: right;">\$ 36.00</td> <td></td> </tr> <tr> <td>Independent Claims</td> <td style="text-align: center;">8 - 3 =</td> <td style="text-align: center;">5</td> <td>x \$80.00</td> <td style="text-align: right;">\$ 400.00</td> <td></td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td style="text-align: right;">+ \$270.00</td> <td></td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td style="text-align: right;">\$</td> <td></td> </tr> <tr> <td colspan="4"> <input type="checkbox"/> Applicant claims small entity status. See 37 C.F.R. 1.27. The fees indicated above are reduced by 1/2. </td> <td style="text-align: right;">+</td> <td></td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td style="text-align: right;">\$</td> <td></td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td style="text-align: right;">\$</td> <td></td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td style="text-align: right;">\$ 1,296.00</td> <td></td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignments (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td> <td style="text-align: right;">+</td> <td></td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td style="text-align: right;">\$ 1,336.00</td> <td></td> </tr> <tr> <td colspan="4"></td> <td style="text-align: right;">Amount to be refunded:</td> <td style="text-align: right;">\$</td> </tr> <tr> <td colspan="4"></td> <td style="text-align: right;">Charged:</td> <td style="text-align: right;">\$</td> </tr> </tbody></table>						CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$		Total Claims	22 - 20 =	2	x \$18.00	\$ 36.00		Independent Claims	8 - 3 =	5	x \$80.00	\$ 400.00		MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00		TOTAL OF ABOVE CALCULATIONS =				\$		<input type="checkbox"/> Applicant claims small entity status. See 37 C.F.R. 1.27. The fees indicated above are reduced by 1/2.				+		SUBTOTAL =				\$		Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$		TOTAL NATIONAL FEE =				\$ 1,296.00		Fee for recording the enclosed assignments (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+		TOTAL FEES ENCLOSED =				\$ 1,336.00						Amount to be refunded:	\$					Charged:	\$
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE			\$																																																																													
Total Claims	22 - 20 =	2	x \$18.00	\$ 36.00																																																																															
Independent Claims	8 - 3 =	5	x \$80.00	\$ 400.00																																																																															
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00																																																																															
TOTAL OF ABOVE CALCULATIONS =				\$																																																																															
<input type="checkbox"/> Applicant claims small entity status. See 37 C.F.R. 1.27. The fees indicated above are reduced by 1/2.				+																																																																															
SUBTOTAL =				\$																																																																															
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$																																																																															
TOTAL NATIONAL FEE =				\$ 1,296.00																																																																															
Fee for recording the enclosed assignments (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+																																																																															
TOTAL FEES ENCLOSED =				\$ 1,336.00																																																																															
				Amount to be refunded:	\$																																																																														
				Charged:	\$																																																																														
a. <input checked="" type="checkbox"/> Two checks in the amount of \$ 1,336.00 to cover the above fees are enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-0320 . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.																																																																																			
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.																																																																																			
SEND ALL CORRESPONDENCE TO: WILLIAM S. FROMMER, ESQ. FROMMER LAWRENCE & HAUG LLP 745 FIFTH AVENUE NEW YORK, NEW YORK 10151																																																																																			
Dated: <u>June 27, 2001</u>																																																																																			
<div style="text-align: right;">  SIGNATURE WILLIAM S. FROMMER NAME 25,506 REGISTRATION NUMBER </div>																																																																																			

23/PRTS

09/869658

JC18 Rec'd PCT/PTO 2 8 JUN 2001

DESCRIPTION

STORAGE MEDIUM, INFORMATION PROCESSING APPARATUS, AND

METHOD

Technical Field

5 The present invention relates to a record medium, an information processing apparatus, and a method, in particular to, those that allow a hardware device necessary for processing information to be easily changed or modified.

10 In addition, the present invention relates to a record medium, an information processing apparatus, and a method that allow a current process to be quickly restored from an abnormality.

Background Art

15 Fig. 1 shows an example of the functional structure of an encoder 10 that composes a delivery side apparatus of a conventional music delivery service system (an example of the structure of a program for an encoding process). The delivery side apparatus of the
20 music delivery service system comprises the encoder 10, a controlling terminal unit (not shown), and a server (not shown). The controlling terminal unit controls the encoding process of the encoder 10. The server supplies music data that is encoded (hereinafter,
25 referred to as PCM (Pulse Code Modulation) non-compressed music data) to the encoder 10, stores music data encoded by the encoder 10 (hereinafter, this data

is referred to as PCM compressed music data), and delivers the PCM compressed music data to a user (reception side) of the music delivery service.

5 The encoder 10 contains hardware devices that are a (first) network card, a (second) network card, and an encode card. The first network card controls a communication with an alarm LAN (alarm Local Area network) to which control data for controlling the encoding process is transferred. The second network card controls a communication with a medium LAN to which PCM non-compressed music data and PCM compressed music data (hereinafter, when it is not necessary to distinguish them, they are simply referred to as music data). The encode card executes the encoding process.

10
15 The program for the encoding process shown in Fig. 1 is composed of five process portions (elements denoted by solid line boxes) that are a control data input - output process portion 11, a network card driver process portion 12, a main process portion 13, a network card driver process portion 14, and an encode card driver process portion 15. Each process portion is composed of an executable program. Each process portion manages data areas (such as buffers and registers). Each process portion is independently
20
25 executed.

The control data input - output process portion 11 communicates with the main process portion

13. The control data input - output process portion 11 receives various commands for the encoding process from the controlling terminal unit through the network card driver process portion 12 and outputs the received commands to the main process portion 13. In addition, the control data input - output process portion 11 outputs messages supplied from the main process portion 13 (the messages are for example a message that represents that the encoding process has been successfully completed and an error message that represents that the encoding process has failed) to the controlling terminal unit through the network card driver process portion 12. When it is not necessary to distinguish commands and error messages exchanged between the control data input - output process portion 11 and the main process portion 13, they are simply referred to as control data.

The main process portion 13 receives for example PCM non-compressed music data from the server (not shown) through the network card driver process portion 14. The network card driver process portion 14 supplies the received PCM non-compressed music data to the encode card through the encode card driver process portion 15. In addition, the main process portion 13 controls the encode card through the encode card driver process portion 15 so as to execute the encoding process corresponding to control data supplied from the

control data input - output process portion 11. In this example, the encode card executes an encoding process corresponding to the MPEG (Moving Picture Experts Group) 1 layer 2 standard with a sampling frequency of 48 KHz (hereinafter, this encoding process is referred to as MPEG 1 based encoding process) or an encoding process corresponding to ATRAC (adaptive transform acoustic coding) 1 (trademark) standard with a sampling frequency of 44.1 KHz (hereinafter, this encoding process is referred to as ATRAC 1 based encoding process).

The main process portion 13 receives PCM compressed music data that has been encoded from the encode card through the encode card driver process portion 15 and supplies the received data to the server through the network card driver process portion 14.

Next, the control data input - output process portion 11 and the main process portion 13 will be described. The control data input - output process portion 11 is composed of three programs (elements denoted by dotted line boxes in Fig. 1) that are a controlling portion 21, a network card input I/F (interface) 22, and a network card output I/F 23 and data areas necessary for executing those programs.

The network card input I/F 22 receives control data from the controlling terminal unit through the network card driver process portion 12 and outputs

the received control data to the controlling portion 21.
The network card output I/F 23 receives for example an
error message from the main process portion 13 through
the controlling portion 21 and outputs the received
5 error message to the network card driver process
portion 12.

The controlling portion 21 controls the
network card input I/F 22 and the network card output
I/F 23. In addition, the controlling portion 21
communicates with a controlling portion 31 of the main
process portion 13.

Next, the structure of the main process
portion 13 will be described. The main process portion
13 comprises seven programs (elements denoted by dotted
boxes) that are a controlling portion 31, a network
card input - output I/F 32, an encode engine input -
output I/F 33, an encode engine input - output I/F 34,
an encode engine 35, an encode card input - output I/F
36, and an encode card input - output I/F 37 and data
20 areas necessary for executing those programs.

The network card input - output I/F 32
receives PCM non-compressed music data through the
network card driver process portion 14 and outputs the
received data to the controlling portion 31. In
25 addition, the network card input - output I/F 32
receives PCM compressed music data from the controlling
portion 31 and outputs the data to the network card

driver process portion 14.

5 The encode engine input - output I/F 33 receives PCM non-compressed music data that is encoded corresponding to the ATRAC 1 based encoding process through the controlling portion 31 and outputs the received PCM non-compressed music data to the encode engine 35. In addition, the encode engine input - output I/F 33 receives PCM compressed music data that has been encoded corresponding to the ATRAC 1 based encoding process from the encode engine 35 and outputs the received PCM compressed music data to the controlling portion 31.

10 The encode engine input - output I/F 34 receives PCM non-compressed music data that is encoded corresponding to the MPEG 1 based encoding process through the controlling portion 31 and outputs the received PCM non-compressed music data to the encode engine 35. In addition, the encode engine input - output I/F 34 receives PCM compressed music data that has been encoded corresponding to the MPEG 1 based encoding process from the encode engine 35 and outputs the received PCM compressed music data to the controlling portion 31.

20 The encode card input - output I/F 36 receives PCM non-compressed music data that is encoded corresponding to the ATRAC 1 based encoding process through the controlling portion 31 and outputs the

received PCM non-compressed music data to the encode
card driver process portion 15. In addition, the
encode card input - output I/F 36 receives PCM
compressed music data that has been encoded
5 corresponding to the ATRAC 1 based encoding process
from the encode card driver process portion 15 and
outputs the received PCM compressed music data to the
controlling portion 31.

The encode card input - output I/F 37
10 receives PCM non-compressed music data that is encoded
corresponding to the MPEG 1 based encoding process
through the controlling portion 31 and outputs the
received PCM non-compressed music data to the encode
card driver process portion 15. In addition, the
15 encode card input - output I/F 37 receives PCM
compressed music data that has been encoded
corresponding to the MPEG 1 based encoding process from
the encode card driver process portion 15 and outputs
the received PCM compressed music data to the
20 controlling portion 31.

As a software process, the encode engine 35
encodes PCM non-compressed music data supplied from the
encode engine input - output I/F 33 and the encode
engine input - output I/F 34 corresponding to the ATRAC
25 1 based encoding process and the MPEG 1 based encoding
process and outputs the encoded PCM compressed music
data to the encode engine input - output I/F 33 and the

encode engine input - output I/F 34.

Although the encoder 10 is structured as described above, each program that composes the control data input - output process portion 11 to the encode card driver process portion 15 is structured depending on predetermined hardware devices such as the network cards and the encode card of the encoder 10.

Thus, when the network cards and encode card of the encoder 10 are changed or extended corresponding to a transmission medium such as the Internet, a digital satellite broadcast, or a ground wave digital broadcast, each process portion should be restructured using time and cost.

In addition, for example, interface programs that control the network cards and encode card as hardware devices disposed in the encoder 10 (these interface programs are the network card input I/F 22, the network card output I/F 23, and the network card input - output I/F 32 to the encode card input - output I/F 37) and driver programs (these programs are the network card driver process portions 12 and 14 and the encode card driver process portion 15) are created by the manufacturer of the encoder 10.

However, when the function of a hardware device as one part of the encoder 10 is more improved, it will be ineffective for the manufacturer of the encoder 10 to create interface programs and driver

programs for a hardware device assembled to the encoder
10. Thus, the manufacture of a hardware device creates
a relevant program and supplies the created program and
the hardware device to the manufacture of the encoder
10.

In such a situation, since the manufacture of
the encoder 10 does not know the detail of a hardware
device as a part of the encoder 10, it becomes
difficult for the manufacture of the encoder 10 to
create the controlling portion 21 and the controlling
portion 31 that control the encoder 10. Thus, it
becomes more difficult to change or extend the hardware
device.

In addition, although the encoder 10 is
structured as described above, when an abnormality
takes place in a process of a program, the process of
the program is temporarily terminated. Thus, it takes
long time to restore the process from the abnormality.
Disclosure of the Invention

The present invention is made from the above-
described point of view. An object of the present
invention is to allow a hardware device to be easily
changed or extended.

Another object of the present invention is to
allow a process of a program to be quickly restored
from a failure state.

The present invention is a record medium for

recording a computer controllable program, the program
being disposed between a controlling portion and
hardware, the program controlling the hardware
corresponding to a message received from the
5 controlling portion, the program comprising a first
process portion for communicating with the controlling
portion, a second process portion for being
communicable with first hardware and second hardware, a
third process portion for communicating with the first
10 process portion and the second process portion and
executing an interfacing process corresponding to the
first hardware, and a fourth process portion for
communicating with the first process portion and the
second process portion and executing an interfacing
15 process corresponding to the second hardware, wherein
the first process portion outputs a message to one of
the third process portion and the fourth process
portion corresponding to a message received from the
controlling portion.

20 The present invention is a storage medium for
storing a computer controllable program, disposed
between a controlling portion and hardware, for
controlling the hardware corresponding to a message
received from the controlling portion, the program
25 containing capsulated process portions, wherein if an
abnormality takes place in each process portion, it is
initialized in one of a first path for initializing a

first buffer for exchanging data with the hardware, a
second path for unallocating a second buffer for
exchanging data with the controlling portion,
allocating the second buffer, initializing the second
5 buffer, and initializing the first buffer, and a third
path for unallocating the second buffer and
unallocating the first buffer.

Brief Description of Drawings

Fig. 1 is a block diagram showing an example
of the functional structure of a conventional encoder;
Fig. 2 is a schematic diagram showing an example of the
structure of a music delivery service system according
to the present invention; Fig. 3 is a schematic diagram
showing an example of the structure of an encoder shown
in Fig. 2; Fig. 4 is a schematic diagram for explaining
a survival time; Fig. 5 is a schematic diagram for
explaining the theory of a real time OS; Fig. 6 is a
schematic diagram showing an example of the structure
of the encoder shown in Fig. 2; Figs. 7A and 7B are
20 schematic diagrams for explaining an ATRAC encoding
process of the process shown in Fig. 6; Figs. 8A and 8B
are schematic diagrams for explaining an MPEG encoding
process of process portions shown in Fig. 6; Fig. 9 is
a schematic diagram for explaining a state transition
25 of the process portions shown in Fig. 6; Fig. 10 is a
flow chart for explaining an initializing process in a
normal state; Figs. 11A to 11C are schematic diagrams

for explaining the structure of an inter process
portion communication message; Figs. 12A and 12B are
schematic diagrams for explaining another structure of
an inter process portion communication message; Fig. 13
5 is a flow chart for explaining a process of a process
portion; Fig. 14 is a flow chart for explaining the
operation of a main application shown in Fig. 6; Fig.
15 is a flow chart for explaining the operation of an
encoding process manager shown in Fig. 6; Fig. 16 is a
schematic diagram for explaining a state transition of
a process portion in the case that an initializing
process is performed when an abnormality takes place;
Fig. 17 is a flow chart for explaining an initializing
process performed when an abnormality takes place; Fig.
18 is a flow chart for explaining an initializing
process performed when an abnormality takes place; Fig.
19 is a schematic diagram showing an example of another
structure of the music delivery service system
according to the present invention; Fig. 20 is a block
20 diagram showing an example of the structure of a
terminal unit shown in Fig. 19; and Fig. 21 is a block
diagram showing an example of the functional structure
of the terminal unit shown in Fig. 19.

Best Mode for Carrying Out the Invention

25 Fig. 2 shows an example of the structure of
the delivery side of a music delivery service system
according to the present invention. In this example,

an alarm LAN 101 and a medium LAN 102 corresponding to the 100 BASE-TX Ethernet (trademark) are disposed. A terminal unit 111 and an encoder 112 are connected to the alarm LAN 101. The encoder 112 and a server 113 are connected to the medium LAN 102.

The terminal unit 111 has a control process portion W composed of a program that controls the encoder 112. Under the control of the control process portion W, the terminal unit 111 communicates with the encoder 112 through the alarm LAN 101 and causes the encoder 112 to execute a predetermined encoding process.

The encoder 112 is controlled by the terminal unit 111. The encoder 112 receives PCM non-compressed music data such as CD-DA (Compact Disc - Digital Audio) stored in the server 113 through the medium LAN 102 and executes the encoding process corresponding to the ATRAC 1 standard or MPEG 1 audio layer 3 (so-called MP3) standard. In addition, the encoder 112 transfers PCM compressed music data that has been encoded to the server 113 through the medium LAN 102 corresponding to for example file transfer base (file transfer protocol: ftp).

The server 113 records PCM non-compressed music data and supplies the data to the encoder 112. In addition, the server 113 records PCM compressed music data received from the encoder 112 and when necessary delivers the data to a user (reception side)

of the music delivery service.

Thus, since the alarm LAN 101 that transfers control data and the medium LAN 102 that transfers music data are independently disposed, the encoding process and the music data delivering process can be more effectively performed.

Fig. 3 shows an example of the structure of the encoder 112. A CPU (Central Processing Unit) 121 expands for example an encoding process program stored in a ROM (Read Only Memory) 122 or a hard disk 127 to a RAM (Random Access Memory) 123 and executes the encoding process corresponding to the encoding process program. The RAM 123 temporarily stores data necessary for executing for example the encoding process. In the RAM 123, a necessary data buffer area is allocated.

A network card 124 is connected to the alarm LAN 101. The network card 124 receives and transmits control data through the alarm LAN 101.

A network card 125 is connected to the medium LAN 102. The network card 125 receives PCM non-compressed music data from the server 113 through the medium LAN 102 and transmits PCM compressed music data that has been encoded by an encode card 126 to the server 113.

The encode card 126 receives PCM non-compressed music data from the network card 125 and encodes the PCM non-compressed music data corresponding

to the ATRAC 1 based encoding process or the MPEG 1 based encoding process.

5 The hard disk 127 stores programs executed by the CPU 121. In addition, the hard disk 127 stores the PCM non-compressed music data received from the network card 125 and the PCM compressed music data encoded by the encode card 126.

10 In this example, since music data is transferred to the medium LAN 102 that is an Ethernet LAN, PCM non-compressed music data is not encoded on real time basis. PCM non-compressed music data that is supplied from the server 113 is stored to the hard disk 127. At a proper timing, the PCM non-compressed music data is supplied to the encode card 126. As a result, 15 the PCM non-compressed music data is encoded by the encode card 126. Thereafter, the PCM compressed music data that has been encoded is stored to the hard disk 127. Since the hard disk 127 is used as a temporary buffer, PCM non-compressed music data is properly 20 encoded.

An interface 128 is disposed among the network card 124, the network card 125, the encode card 126, the hard disk 127, and the CPU 121. The interface 128 executes an interfacing process.

25 The CPU 121, the ROM 122, the RAM 123, and the interface 128 are disposed on one mother board 120.

The music delivery service system is

controlled by a real time OS (Operating System). The real time OS is a multitask OS that simultaneously operates a plurality of tasks (processes). By a non-multitask OS, while a particular process is being executed, even if another event (namely, an external request) takes place, the event handler for the external request may not immediately get started. In contrast, by the real time OS, it is assured that in a predetermined time period, a relevant event handler gets started. In other words, as shown in Fig. 4, a process that is started in predetermined time corresponding to a clock (the predetermined time is referred to as survival time) is completed in the survival time.

Fig. 5 schematically shows the basic concept of the real time OS. When each process portion is generated, it is managed so that it successively advances to one of three states that are operation state, wait state, and operation enable state. Each process portion is managed with a flag. When each process portion advances from the operation state to the wait state, a command waitFlag that causes the process portion to wait for a flag is generated. When each process portion advances from the wait state to the operation enable state, a command setFlag that sets a value to a flag is generated.

A plurality of process portions can take

place at the same time. Priority is assigned to each of the plurality of process portions. The real time OS passes an execution right to a process portion assigned the highest priority in process portions that are in the operation enable state.

When an event takes place, the real time OS can quickly the current process portion to another process portion assigned the highest priority in process portions that are in the operation state.

Fig. 6 shows an example of the functional structure of the encoder 112 (namely, an example of the structure of an encoding process program). The encoding process program is composed of three process portions (each of which has an executable program and a data area necessary for executing the program) and three capsules (elements denoted by dual line boxes). The three processes are a capsule manager 151, an encoding process controlling application 152, and a main application 153. The three capsules are a control data input - output capsule 154, a music data input - output capsule 155, and an encoding process capsule 156. Each capsule is composed of a plurality of process portions that are formed as a block (capsulated). In Fig. 6, an element denoted by a solid line box is a process portion.

The capsule manager 151 controls the encoding process controlling application 152, the control data

input - output capsule 154, the music data input -
output capsule 155, and the encoding process capsule
156 through the main application 153.

5 The encoding process controlling application
152 communicates with the main application 153,
receives a command from for example the capsule manager
151, and controls the control data input - output
capsule 154 corresponding to the command. The main
application 153 directly communicates with the capsule
10 manager 151 and controls the music data input - output
capsule 155 and the encoding process capsule 156
corresponding to a command received from the capsule
manager 151.

15 The control data input - output capsule 154
is managed by an encoding process controlling manger
161. The encoding process controlling manger 161
generates and erases a network card input I/F process
portion 162 (hereinafter referred to as network card
input I/F, this applied to other process portions), a
20 network card output I/F 163, and a network card driver
(process portion) 164 corresponding to a command
received from the encoding process controlling
application 152.

25 The network card input I/F 162 receives
control data (command) from the control process portion
W of the terminal unit 111 through the network card 124
and the network card driver 164 and outputs the control

data to the encoding process controlling manger 161.
The network card output I/F 163 receives control data
(message) from the main application 153 through the
encoding process controlling application 152 and the
5 encoding process controlling manger 161 and outputs the
control data to the network card driver 164.

The network card driver 164 executes an input
- output interfacing process for the network card 124,
receives control data (command) transferred on the
10 alarm LAN 101, and outputs the control data to the
network card input I/F 162. In addition, the network
card driver 164 receives control data (message) from
the network card output I/F 163 and outputs the control
data to the network card 124.

The music data input - output capsule 155 is
15 managed by a data input - output manager 171. The data
input - output manager 171 generates and deletes a
network card input - output I/F 172 (process portion)
and a network card driver 173 (process portion)
20 corresponding to a command received from the main
application 153.

The network card input - output I/F 172
receives PCM non-compressed music data from the server
113 through the network card 125 and the network card
25 driver 173 and outputs the PCM non-compressed music
data to the data input - output manager 171. In
addition, the network card input - output I/F 172

receives PCM compressed music data from the data input
- output manager 171 and outputs the PCM compressed
music data to the network card driver 173.

5 The network card driver 173 executes an input
- output interfacing process for the network card 125,
receives PCM non-compressed music data transferred on
the medium LAN 102, and outputs the PCM non-compressed
music data to the network card input - output I/F 172.
In addition, the network card driver 173 receives PCM
10 compressed music data from the network card input -
output I/F 172 and outputs the PCM compressed music
data to the network card 125.

The encoding process capsule 156 is managed
by an encoding process manager 181. The encoding
15 process manager 181 generates and deletes an encode
engine input - output I/F 182, an encode engine input -
output I/F 183, an encode engine 184, an encode card
input - output I/F 185, an encode card input - output
I/F 186, and an encode card driver 187 (all are process
20 portions). In addition, the encoding process manager
181 performs an encoding process type determining
process for determining whether the encoding process is
performed by software (encode engine 184) or hardware
(encode card 126). In addition, the encoding process
25 manager 181 performs an encoding process type
determining process for determining whether the
encoding process is performed corresponding to the

ATRAC 1 based encoding process or the MPEG 1 based encoding process.

5 The encode engine input - output I/F 182 receives PCM non-compressed music data that is encoded corresponding to the ATRAC 1 based encoding process from the encoding process manager 181 and outputs the PCM non-compressed music data to the encode engine 184. In addition, the encode engine input - output I/F 182 receives PCM compressed music data that has been encoded corresponding to the ATRAC 1 based encoding process from the encode engine 184 and outputs the PCM compressed music data to the encoding process manager 181.

10 The encode engine input - output I/F 183 receives PCM non-compressed music data that is encoded corresponding to the MPEG 1 based encoding process from the encoding process manager 181 and outputs the PCM non-compressed music data to the encode engine 184. In addition, the encode engine input - output I/F 183 receives PCM compressed music data that has been encoded corresponding to the MPEG 1 based encoding process from the encode engine 184 and outputs the PCM compressed music data to the encoding process manager 181.

25 The encode engine 184 executes the ATRAC 1 based encoding process by software or the MPEG 1 based encoding process by software corresponding to control

data supplied from the encode engine input - output I/F 182 and the encode engine input - output I/F 183.

5 The encode card input - output I/F 185 receives PCM non-compressed music data that is encoded corresponding to the ATRAC 1 based encoding process from the encoding process manager 181 and outputs the PCM non-compressed music data to the encode card driver 187. In addition, the encode card input - output I/F 185 receives PCM compressed music data that has been encoded corresponding to the ATRAC 1 based encoding process from the encode card driver 187 and outputs the PCM compressed music data to the encoding process manager 181.

10 The encode card input - output I/F 186 receives PCM non-compressed music data that is encoded corresponding to the MPEG 1 based encoding process from the encoding process manager 181 and outputs the PCM non-compressed music data to the encode card driver 187. In addition, the encode card input - output I/F 186 receives PCM compressed music data that has been encoded corresponding to the MPEG 1 based encoding process from the encode card driver 187 and outputs the PCM compressed music data to the encoding process manager 181.

20 The encode card driver 187 executes an input - output interfacing process for the encode card 126, receives PCM non-compressed music data from the encode

card input - output I/F 185 and the encode card input -
output I/F 186, and outputs the PCM non-compressed
music data to the encode card 126. In addition, the
encode card driver 187 receives PCM compressed music
5 data that has been encoded from the encode card 126,
and outputs the PCM compressed music data to the encode
card input - output I/F 185 and the encode card input -
output I/F 186. When the encode card 126 as a hardware
device performs the ATRAC 1 based encoding process, it
10 is substituted with a device having a relevant function.
When the encode card 126 performs the MPEG 1 based
encoding process, it is substituted with a device
having a relevant function.

Next, with reference to a flow chart shown in
Fig. 7, the processes performed by the individual
15 process portions in the case that the ATRAC 1 based
encoding process is performed will be described.

When the power of the encoder 112 is turned
on, the real time OS generates the capsule manager 151.
20 The capsule manager 151 causes the main application 153
to generate the music data input - output capsule 155
and the encoding process capsule 156. In addition, the
capsule manager 151 causes the encoding process
controlling application 152 to generate the control
25 data input - output capsule 154.

When the control process portion W of the
terminal unit 111 sends a command for the ATRAC 1 based

encoding process to the network card 124 of the encoder
112 through the alarm LAN 101, the command is supplied
from the network card driver 164 of the control data
input - output capsule 154 to the encoding process
5 controlling manger 161 through the network card input
I/F 162. When the encoding process controlling manger
161 receives the command, the encoding process
controlling manger 161 requests the encoding process
controlling application 152 to start the ATRAC 1 based
10 encoding process at step S1.

The encoding process controlling application
152 receives the request message from the encoding
process controlling manger 161 at step S11. The
request message contains code information that
45 represents an encoding process type and an a portion
that executes the encoding process. In this example,
the encoding process type is the ATRAC 1 based encoding
process and the portion that executes the encoding
process is a hardware device (encode card 126).

20 When the encoding process controlling
application 152 receives the request message from the
encoding process controlling manger 161, the encoding
process controlling application 152 requests the main
application 153 to permit the ATRAC 1 based encoding
25 process at step S12.

When the main application 153 receives the
request message from the encoding process controlling

application 152 at step S31, the main application 153 determines whether or not the process corresponding to the request message can be executed. When the process cannot be executed, the main application 153 sends a
5 reply message that represents that the process cannot be executed to the encoding process controlling application 152. When the encoding process controlling application 152 receives the reply message, the encoding process controlling application 152 sends the
10 reply message to the encoding process controlling manger 161. The encoding process controlling manger 161 sends the reply message to the control process portion W of the terminal unit 111 through the encoding process controlling manger 161, the network card output
15 I/F 163, the network card driver 164, and the network card 124.

In the example shown in Fig. 7, the main application 153 determines that the ATRAC 1 based encoding process can be executed and sends a relevant
20 permission reply message to the encoding process controlling application 152 at step S32.

When the encoding process controlling application 152 receives the permission reply message from the main application 153 at step S13, the encoding
25 process controlling application 152 outputs a reply message that represents the start of the ATRAC 1 based encoding process to the encoding process controlling

manger 161 at step S14. The encoding process
controlling manger 161 receives the reply message at
step S2. In the above-described manner, the encoding
process controlling manger 161 sends the reply message
5 to the control process portion W.

The main application 153 outputs a permission
reply message for the ATRAC 1 based encoding process to
the encoding process controlling application 152 at
step S32. Thereafter, the main application 153
10 requests the data input - output manager 171 of the
music data input - output capsule 155 to acquire object
data that is encoded (namely, outputs an object data
acquisition request message). The object data
acquisition request message contains the address of the
object data in the storing portion, the data amount
15 thereof, and so forth.

When the data input - output manager 171
receives the request message from the main application
153 at step S81, the data input - output manager 171
20 executes a process for acquiring the object data that
is encoded from the designated address at step S82.

When the object data is stored in the hard
disk 127, the data input - output manager 171 accesses
the hard disk 127 through the network card input -
25 output I/F 172, the network card driver 173, and the
network card 125 and acquires PCM non-compressed music
data for the designated amount from the designated

address.

When the object data is recorded on a CD-R (not shown) or the like, the data input - output manager 171 accesses it and acquires the object data therefrom. When the object data is recorded in the server 113, the data input - output manager 171 accesses the server 113 through the alarm LAN 101 and receives the object data from the server 113 through the medium LAN 102. The acquired PCM non-compressed music data is temporarily stored to a buffer area of the RAM 123.

When the PCM non-compressed music data is acquired in such a manner, the data input - output manager 171 sends an object data acquisition completion reply message to the main application 153 at step S83.

When the main application 153 receives the object data acquisition completion reply message from the data input - output manager 171 at step S34, the main application 153 requests the encoding process manager 181 to start encoding the object data at step S35. This request message contains information that represents that the encoding process type is the ATRAC 1 based encoding process and the encoding process portion is the encode card 126.

When the encoding process manager 181 receives the encoding process start request message from the main application 153 at step S61, the encoding

process manager 181 determines whether or not the process for the request message can be executed. When the process for the request message cannot be executed, the encoding process manager 181 outputs a reply message that represents that the process for the request message cannot be executed to the main application 153. In the example shown in Fig. 7, the encoding process manager 181 determines that the encoding process can be executed and outputs a reply message that represents that the encoding process can be executed to the main application 153 at step S62.

The main application 153 receives the encoding process start reply message from the encoding process manager 181 at step S36. Thus, the main application 153 knows that the encoding process manager 181 has accepted the process for the request message sent at step S35.

After the encoding process manager 181 outputs an encoding process start reply message to the main application 153 at step S62, the encoding process manager 181 causes the main application 153 to execute the encoding process at step S63. In reality, the encoding process manager 181 requests the encode card 126 to execute the ATRAC 1 based encoding process through the encode card input - output I/F 185 and the encode card driver 187 corresponding to the encoding process start request message received from the main

application 153. This request message contains the address of a buffer of the RAM 123 for the PCM compressed music data. The encode card 126 reads the PCM non-compressed music data from the buffer area of the RAM 123 corresponding to the request message and executes the ATRAC 1 based encoding process. The encoded PCM compressed music data is recorded to the RAM 123.

After the encode card 126 has completed the encoding process, the encoding process manager 181 sends an encoding process completion message that represents the encoding process has been completed to the main application 153 at step S64.

When the main application 153 receives the encoding process completion message from the encoding process manager 181 at step S37, the main application 153 sends a encoding process completion reply message to the encoding process manager 181 at step S38.

The encoding process manager 181 receives the encoding process completion reply message from the main application 153 at step S65. Thus, the encoding process manager 181 acknowledges that the encoding process completion message has been sent to the main application 153.

After the main application 153 outputs the encoding process completion reply message to the encoding process manager 181 at step S38, the main

application 153 outputs a generated data storing request message for PCM compressed music data that has been encoded and generated to the data input - output manager 171. This request message contains the address of a medium that stored the data. When the PCM compressed music data that has been encoded is stored to the hard disk 127, the request message contains the address of the hard disk 127.

When the data input - output manager 171 receives the generated data storing request message from the main application 153 at step S84, the data input - output manager 171 executes a process for storing the received data corresponding to the request message at step S85. In reality, when the request message represents that the generated data should be stored to the hard disk 127, the data input - output manager 171 accesses the hard disk 127 through the network card input - output I/F 172, the network card driver 173, and the network card 125 and records the PCM compressed music data that has been encoded to the designated address of the hard disk 127.

When the request message represents that the generated data should be stored to a CD-R, the PCM compressed music data that has been encoded is stored to the designated address of the CD-R. When the request message represents that the generated data should be stored to the server 113, the PCM compressed

music data that has been encoded is supplied and stored to the server 113 through the medium LAN 102.

After the PCM compressed music data has been stored in the above-described manner, the data input -
5 output manager 171 outputs a generated data storage completion reply message that represents that the data has been stored to the main application 153 at step S86.

When the main application 153 receives the generated data storage completion reply message from the data input - output manager 171 at step S40, the
10 main application 153 outputs a completion message that represents that the ATRAC 1 based encoding process has been completed to the encoding process controlling application 152 at step S41.

When the encoding process controlling
15 application 152 receives the message from the main application 153 at step S15, the encoding process controlling application 152 sends a message that represents that the ATRAC 1 based encoding process has
20 been completed to the encoding process controlling manger 161 at step S16.

When the encoding process controlling manger 161 receives the completion message from the encoding process controlling application 152 at step S3, the
25 encoding process controlling manger 161 outputs a reply message corresponding to the completion message to the encoding process controlling application 152 at step S4.

When the encoding process controlling application 152 receives the reply message from the encoding process controlling manger 161 at step S17, the encoding process controlling application 152 sends an ATRAC 1 based encoding process completion replay message to the main application 153 at step S18.

The main application 153 receives the completion reply message from the encoding process controlling application 152 at step S42.

Fig. 8 shows the MPEG 1 based encoding process. Steps S101 to S142 shown in Fig. 8 are basically the same as steps S1 to S42 of the ATRAC 1 based encoding process shown in Fig. 7. However, in Fig. 8, the encoding process type is the MPEG 1 based encoding process rather than the ATRAC 1 based encoding process. Thus, in the object data acquisition process at step S182 shown in Fig. 8 corresponding to step S82 shown in Fig. 7, the data sending amount and the data sending timing in the format corresponding to the ATRAC 1 based encoding process are changed to those corresponding to the MPEG 1 based encoding process.

In addition, in the process at step S163 shown in Fig. 8 corresponding to the process at step S63 of the ATRAC 1 based encoding process shown in Fig. 7, the MPEG 1 based encoding process is executed rather than the ATRAC 1 based encoding process. Of course, since the ATRAC 1 based encoding process is different

from the MPEG 1 based encoding process, for example,
different encoding data unit, different sending timing,
and different error correction code are used.

This applies to the process at step S185
shown in Fig. 8 corresponding to the process at step
S85 shown in Fig. 7.

However, all processes required due to the
different encoding method are executed by each process
portion such as the capsule manager 151 of the encoding
process capsule 156 and each process portion such as
the data input - output manager 171 of the music data
input - output capsule 155. Thus, the main application
153, the encoding process controlling application 152,
and so forth do not need to precisely recognize the
differences between the ATRAC 1 based encoding process
and the MPEG 1 based encoding process.

In other words, from the view point of the
main application 153, the details of the data acquiring
process and the data storing process executed by the
data input - output manager 171 of the music data input
- output capsule 155 and the encoding process executed
by the encoding process manager 181 of the encoding
process capsule 156 are concealed.

For example, when the data input - output
manager 171 acquires data from the hard disk 127, the
data input - output manager 171 uses ATA (AD (Advanced
Technology) Attachment) command. However, when the

data input - output manager 171 acquires data from the server 113 on the network, the data input - output manager 171 uses FTP (File Transfer Protocol) of TCP/IP (Transmission Control Protocol / Internet Protocol) or HTTP (Hyper Text Transport Protocol).

When the data input - output manager 171 acquires data from a CD-R, the data input - output manager 171 uses the SCSI (Small Computer System Interface) interface. When the data input - output manager 171 acquires data from a CD-R, the data input - output manager 171 uses the ATAPI (AT Attachment Packet Interface).

When the ATRAC type encoding process is performed at high speed, the process is performed through the ATRAC encoder driver of the encode card driver 187. When the MPEG format encoding process is performed at high speed, the process is performed through the MPEG encoder driver of the encode card driver 187.

The encoding process capsule 156 performs processes using various hardware driver protocols. However, the main application 153 requires only three simple sequences that are a data acquisition request, an encoding process start request, and a data storing request.

Thus, the encoding process capsule 156 and the music data input - output capsule 155 conceal these

protocols and data acquiring method against the main application 153.

As a result, the main application 153 and the encoding process controlling application 152 need to only determine what encoding process type is used and whether the encoding process is executed by software or hardware. Thus, even if the encoding process type is changed or extended, it is not necessary to change the main application 153 and the encoding process controlling application 152. If necessary, their changes are small.

The program for the encoding process of the encoder 112 is structured as described above. The process portions (elements denoted by solid line boxes) shown in Fig. 6 change their states corresponding to a state transition chart shown in Fig. 9 and execute their processes.

The states shown in Fig. 9 compose the operation states shown in Fig. 5.

The state transition chart shown in Fig. 9 show 12 types of states that are execute (EXECUTE), initialize 0 (INITIALIZE 0), initialize 1 (INITIALIZE 1), initialize 2 (INITIALIZE 2), terminate 1 (TERMINATE 1), terminate 0 (TERMINATE 0), exit (EXIT), receive (RECEIVE), reply (REPLY), manage (MANAGE), send (SEND), and ready (READY).

Next, with reference to a flow chart shown

Fig. 10, the state transition in the case that each process portion is normal will be described.

When the power of the terminal unit is turned on, the real time OS gets started and generates a process portion. The process portion advances to the execute state (EXECUTE) A at step S201.

Thereafter, the process portion advances to the initialize 0 state (INITIALIZE 0) B at step S202. In the initialize 0 state (INITIALIZE 0) B, the capsule (module) registering process is executed. In reality, a first buffer used to exchange data with the hardware device is allocated. Thereafter, the first buffer is initialized (for example 0s are written to the first buffer). Thereafter, the device is opened. Next, it is determined whether or not the device is normal. This process is performed once time when the power of the terminal unit is turned on.

The process portion advances from the initialize 0 state (INITIALIZE 0) B to the initialize 1 state (INITIALIZE 1) C at step S203. In initialize 1 state (INITIALIZE 1) C, the capsule resource allocating process is executed. Thus, a second buffer used to exchange data with the main application 153 is allocated. Thereafter, the second buffer is initialized. Next, a register is initialized.

The process portion advances from the initialize 1 state (INITIALIZE 1) C to the initialize 2

state (INITIALIZE 2) D at step S204. In the initialize
2 state (INITIALIZE 2) D, an initializing process for
the capsules including the device is executed. When
the initializing process is executed, the first buffer
5 is initialized again (at that point, the allocating
process is not performed).

Thereafter, the process portion advances from
the initialize 2 state (INITIALIZE 2) D to the ready
state (READY) E at step S205.

10 Each process portion advances to one of the
states E, F, G, H, I, J, K, L, and M shown in Fig. 9 at
step S205. In other words, each process portion
determines whether or not a process request message for
a completion request has been received at step S206.
15 When a process request message other than the
completion request has been received, the flow returns
to step S205. At step S205, each process portion
advances to a relevant state.

20 When the process portion is in one of the
states E to M, if the determined result at step S206
represents that a process request message of a
completion request has been received, the flow advances
to step S207. The process portion advances to the
terminate 1 state (TERMINATE 1) N at step S207. In the
25 terminate 1 state N, an unallocating process for the
second buffer is performed. Thereafter, the flow
advances to step S208. The process portion advances to

the terminate 0 state (TERMINATE 0) 0 at step S208. In the terminate 0 state (TERMINATE 0) 0, the first buffer is unallocated. In addition, the device is closed.

Thereafter, the flow advances to step S209.

5 The process portion advances to the exit state (EXIT) P at step S209. In the exit state P, the real time OS is stopped and the power of the terminal unit is turned off.

10 Each process portion exchanges an inter process portion communication message with other process portions. In a particular state, each process portion advances to another state denoted by an arrow mark shown in Fig. 9.

15 Fig. 11 shows the format of an inter process portion communication message. As shown in Fig. 11A, an inter process portion communication message is composed of a header and an extended portion. Data is written to the header and the extended portion of the inter process portion communication message
20 corresponding to the FTP (File Transfer Protocol) format. As shown in Fig. 11C, "unsigned short type;" of the header contains message type (denoted by MSGT (Message Type), function type (denoted by FNCT (Function Type)), message number (denoted by MSGN (Message number)), and function number (denoted by FNCN (Function Number)).
25

MSGT contains data of one of 00 to 11

assigned corresponding to a requested process of interrupt, send, receive, or reply.

<Process>	<Data>
Interrupt (INT (INTERRUPT))	00B
Send (SND (SEND))	01B
Receive (RCV (RECEIVE))	10B
Reply (RPY (REPLY))	11B

MSGN contains one of data assigned corresponding to a requested process.

<Process>	<Data>
Quit (QUT (QUIT))	001B
Reset (RST (RESET))	010B
Terminate (TRM (TERMINATE))	011B
Request (REQ (REQUEST))	100B
Notify (NTF (NOTIFY))	101B
Refuse (RFS (REFUSE))	110B
Acknowledgement (ACK (ACKNOWLEDGE))	111B

FNCT and FNCN contain data corresponding to a requested process.

<FNCT>	<FNCN>
Encode	ATRAC 1 based encoding process MPEG 1 based encoding process
File transfer	put get

"pid_t src_pid" of the header contains the ID of the source process portion of an inter process portion communication message. "pid_t dst_pid" of the

header contains the ID of the destination process portion of an inter process portion communication message.

5 The extended portion of an inter process portion communication message contains data of the stored location of encoded PCM non-compressed music data (for example, a memory address of the hard disk 127) and data of the stored location of encoded PCM compressed music data.

10 An inter process portion communication message shown in Fig. 12 is composed of only the header of the inter process portion communication message shown in Fig. 11.

15 Next, the state transition from the state E to the state M shown in Fig. 9 at steps S205 and S206 shown in Fig. 10 will be described. In this example, the case that the main application 153 requests the encoding process manager 181 to perform the ATRAC 1 based encoding process corresponding to a request
20 message received from the terminal unit 111 (control process portion W) will be described.

Each process is programmed as shown in Fig. 13. In Fig. 13, each process portion starts from a process waiting state at step S221. Thereafter, the
25 flow advances to step S222. The process portion executes a predetermined process at step S222. When the process portion completes the process, the flow

returns to step S221. Thus, the state transition of each process portion is pre-defined. In other words, the direction of the state transition is not defined in each state. Thus, the states of each process portion advance corresponding to routes represented by arrow marks shown in Fig. 9.

First of all, the state transition of the main application 153 will be described with reference to a flow chart shown in Fig. 14. It is assumed that the main application 153 has advanced to the ready state (READY) E at steps S201 to S205 shown in Fig. 10.

The main application 153 sends an inter process portion communication message having a header containing MSGT = SND, MSGN = REQ, FNCT = data representing encode, and FNCN = ATRAC 1 based encoding process (hereinafter, an inter process portion communication message having a header containing MSGT = SND and MSGN = REQ is denoted by (SND, REQ) message; this notation applies to other inter process portion communication messages) to the encoding process manager 181. Thereafter, the main application 153 advances from the ready state (READY) E to the send state (SEND) J.

The header of the (SND, REQ) message has "pid_t src_pid" containing the ID of the main application 153 as the source process portion and "pid_t dst_pid" containing the ID of the encoding

process manager 181 as the destination process portion.
In addition, the (SND, REQ) message has the extended
portion as shown in Fig. 11. The extended portion
contains the memory address of the hard disk 127 for
5 encoded PCM non-compressed music data and the memory
address of the hard disk 127 for encoded PCM compressed
music data.

In Fig. 9, messages in brackets represent
receive messages, whereas messages without brackets
10 represent send messages.

At that point, the main application 153
starts up a built-in timer t.

Thereafter, the main application 153 waits
until an inter process portion communication message
having the header containing MSGT = RPY (this message
is denoted by (RPY, XXX) message) corresponding to the
(SND, REQ) message sent at step S311 is received from
the encoding process manager 181. When the main
15 application 153 has received the (RPY, XXX) message
from the encoding process manager 181, the flow
advances to step S313. The (RPY, XXX) message has a
structure shown in Fig. 12. The (RPY, XXX) message has
a structure shown in Fig. 12. In other words, the (RPY,
20 XXX) message is composed of only a header.

25 The main application 153 determines whether
or not the (RPY, XXX) message received at step S312 is
a (RPY, ACK) message (containing MSGT = RPY and MSGN =

ACK) at step S313. When the determined result at step S313 represents that the (RPY, XXX) message is a (RPY, ACK) message, the flow advances to step S314. As in this example, when the encoding process manager 181 receives a request message for the encoding process, if the encoding process can be performed, the encoding process manager 181 sends the (RPY, ACK) message to the main application 153.

The main application 153 advances from the send state (SEND) J to the manage state (MANAGE) K at step S314. In the manage state (MANAGE) K, the main application 153 executes a predetermined process. However, in this case, the main application 153 does not execute any process. In the manage state (MANAGE) K, each process portion can execute a predetermined process when necessary.

The main application 153 sends an encoding process completion waiting (RCV, REQ) message to the encoding process manager 181 at step S315. At that point, the main application 153 advances from the manage state (MANAGE) K to the receive state (RECEIVE) L. The main application 153 waits until a (SND, NTF) message (representing that the encoding process completion waiting message has been received) is received from the encoding process manager 181 at step S316. When the main application 153 receives the (SND, NTF) message, the flow advances to step S317.

The main application 153 advances from the receive state (RECEIVE) L to the reply state (REPLY) M at step S317. In the reply state (REPLY) M, the main application 153 sends a (RPY, NTF) message as a reply message of the (SND, NTF) message to the encoding process manager 181 at step S318. Thereafter, the flow advances to step S318. The main application 153 advances from the reply state (REPLY) M to the ready state (READY) E at step S318 and completes the process.

When the encoding process manager 181 receives a (SND, REQ) message as an encoding process request message from the main application 153, if the encoding process cannot be executed due to any reason, the encoding process manager 181 sends a (RPY, NTF) message that represents that the encoding process cannot be executed. In this case, the encoding process manager 181 determines that the received (RPY, XXX) message is not the (RPY, ACK) message at step S313. As a result, the flow advances to step S318, skipping steps S314 to S317. The main application 153 advances from the send state (SEND) J to the ready state (READY) E and completes the process.

In the send state (SEND) J, the manage state (MANAGE) K, and the receive state (RECEIVE) L, the main application 153 determines whether or not the measured time of the timer t that has been started at step S311 exceeds predetermined time. When the determined result

represents that the measured time does not exceed the predetermined time, the main application 153 executes the above-described process. In contrast, when the determined result represents that the measured time of the timer t exceeds the predetermined time (namely, the timer t has timed out), the main application 153 advances to the ready state (READY) E and completes the process.

Next, the state transition of the encoding process manager 181 in such a case will be described with reference to a flow chart shown in Fig. 15. The encoding process manager 181 sends a (RCV, REQ) message that represents the encoding process manager 181 waits for an encoding process request to the main application 153 at step S321. The encoding process manager 181 advances from the ready state (READY) E to the receive state (RECEIVE) F. At that point, the encoding process manager 181 starts up the built-in timer t.

When the encoding process manager 181 receives a (SND, REQ) message as an encoding process request message from the main application 153 (this message is sent at step S311 shown in Fig. 14) at step S322, the encoding process manager 181 determines whether or not the requested encoding process can be executed at step S323. When the requested encoding process can be executed, the flow advances to step S324. The encoding process manager 181 advances from the

receive state (RECEIVE) F to the reply state (REPLY) G at step S324.

5 The encoding process manager 181 sends a (RPY, ACK) message as an encoding process acceptance reply message corresponding to the (SND, REQ) message as an encoding process request message received from the main application 153 to the main application 153 at step S324. The encoding process manager 181 advances to the manage state (MANAGE) H at step S324.

10 The encoding process manager 181 controls the encode card 126 through the encode card input - output I/F 185 and the encode card driver 187 and executes the requested ATRAC 1 based encoding process in the manage state (MANAGE) H at step S325.

15 The capsule manager 151 decides the priority and the schedule algorithm of each capsule of the control data input - output capsule 154, the music data input - output capsule 155, and the encoding process capsule 156 and each process of each capsule.

20 When the encoding process for PCM non-compressed music data is started, higher priority is assigned to the encoding process capsule 156 than each of the control data input - output capsule 154 and the music data input - output capsule 155. When the ATRAC
25 1 based encoding process is executed, the highest priority is assigned to the encoding process manager 181 of the encoding process capsule 156. The next

highest priority is assigned to the encode engine input
- output I/F 182, the encode engine 184, the encode
card input - output I/F 185, and the encode card driver
187. The lowest priority is assigned to each of the
5 encode engine input - output I/F 183 and the encode
card input - output I/F 186.

In other words, when the ATRAC 1 based
encoding process is executed, higher priority is
assigned to each of the encode engine input - output
10 I/F 182 that interfaces with the encode engine 184 for
the input and output of music data encoded
corresponding to the ATRAC 1 based encoding process and
the encode card input - output I/F 185 that interfaces
with the encode card driver 187 for the input and
15 output of music data encoded corresponding to the ATRAC
1 based encoding process than each of the encode engine
input - output I/F 183 that interfaces with the encode
engine 184 for the input and output of music data
encoded corresponding to the MPEG 1 based encoding
20 process and the encode card input - output I/F 186 that
interfaces with the encode card driver 187 for the
input and output of music data encoded corresponding to
the MPEG 1 based encoding process.

In addition, even if the ATRAC 1 based
25 encoding process is executed, when a command for an
encoding process using hardware rather than software is
issued, higher priority is assigned to the encode card

input - output I/F 185 than the encode engine input - output I/F 182.

5 The capsule manager 151 supplies the priority of each capsule and each process portion decided in the above-described manner to each manager (the encoding process controlling manger 161, the data input - output manager 171, and the encoding process manager 181) of the control data input - output capsule 154, the music data input - output capsule 155, and the encoding process capsule 156 through the encoding process controlling application 152 and the main application 153. Each manager generates process portions corresponding to the priority of process portions and cause them to executes their processes.

10 For example, when the ATRAC 1 based encoding process is executed, the encoding process manager 181 of the encoding process capsule 156 generates the encode engine input - output I/F 182, the encode engine 184, the encode card input - output I/F 185, and the encode card driver 187 and supplies the inter process portion communication messages to them. The encode engine input - output I/F 182, the encode engine 184, the encode card input - output I/F 185, and the encode card driver 187 send and receive the supplied inter process portion communication messages to communicable process portions and execute the encoding process.

20 Thus, in this example, PCM non-compressed music data is

25

read from the address of the hard disk 127
corresponding to data contained in the extended portion
of an inter process portion communication message. The
PCM non-compressed music data is encoded corresponding
5 to the ATRAC 1 based encoding process and stored to the
address of the hard disk 127 corresponding to data
contained in the extended portion of the inter process
portion communication message.

In the example of the process shown in Fig.
10 15, since the ATRAC 1 based encoding process is
executed by hardware, the encode engine input - output
I/F 182, the encode engine input - output I/F 183, the
encode engine 184, and the encode card input - output
I/F 186 are not generated. Thus, it is not necessary
15 to allocate a resource for them. The resource can be
used for other process portions.

Returning to Fig. 15, when the encoding
process manager 181 completes the encoding process at
step S325, the encoding process manager 181 advances
20 from the manage state (MANAGE) H to the send state
(SEND) I at step S326. In the send state (SEND) I, the
encoding process manager 181 sends a (SND, NTF) message
that represents that the encoding process has been
completed to the main application 153.

25 The encoding process manager 181 waits until
it receives a (RPY, NTF) message (that represents that
the encoding process completion waiting message sent at

step S317 shown in Fig. 14) has been received) from the main application 153 at step S327. When the encoding process manager 181 receives the (RPY, NTF) message, the flow advances to step S328. The encoding process manager 181 advances from the send state (SEND) I to the ready state (READY) E and completes the process at step S328.

In the manage state (MANAGE) H and the send state (SEND) I, the encoding process manager 181 determines whether or not the measured time of the timer t started at step S321 exceeds predetermined time. When the determined result represents that the measured time does not exceed the predetermined time, the encoding process manager 181 executes the process as described above. However, when the determined result represents that the measured time exceeds the predetermined time, the encoding process manager 181 advances to the ready state (READY) E and completes the process.

As was described above, the state of each process portion advances corresponding to the content of an inter process portion communication message. Thus, the main application 153 can cause the encoding process manager 181 to execute a predetermined encoding process with a message that represents the stored location of data that is encoded, the stored location of encoded PCM compressed music data or the encoding

process type. In other words, the main application 153
does not need to control process portions other than
the encoding process manager 181 of the encoding
process capsule 156 (for example, the main application
5 153 does not need to control data process and buffer
process) and control data transfer. Thus, even if the
encode card 126 is substituted with another encode card
that has a higher performance than that, when a
relevant encoding process capsule 156 is provided along
10 with the other encode card, it is not necessary to
restructure the main application 153. Thus, the other
encode card can be used (controlled) as it is.

That applies to the relation between the main
application 153 and the music data input - output
capsule 155 and the relation between the encoding
15 process controlling application 152 and the control
data input - output capsule 154.

In the above example, the encoder 112
executes the ATRAC 1 based encoding process and the
20 MPEG 1 based encoding process. In addition, the
encoder 112 can execute an encoding process in another
format such as MP3, an effect function, and so forth.

For example, the encoder 112 may be an
encoder in the format corresponding to the ATRAC3
25 (Adaptive Transform Acoustic Coding 3) (trademark),
MPEG-2AAC (Advanced Audio Code) (trademark), ODesign
Music Codec (trademark), TwinVO (Transform-Domain

Weighted Interleave Vector Quantization) (trademark), MS Audio (Microsoft Audio (WMA: Windows Media Audio) (trademark), Ogg Vorbis (trademark), or the like.

Next, with reference to Fig. 16, an
5 initializing process in the case that an abnormality takes place in each state will be described. State Q shown in Fig. 16 corresponds to the ready state (READY) E, the receive states (RECEIVE) F and L, the reply states (REPLY) G and M, the manage states (MANAGE) H and K, and the send states (SEND) I and J. In other
10 words, there are three routes as initializing routes in the case that an interrupt (INTERRUPT) message is received in each of those states. The first route is the initialize 2 state (INITIALIZE 2) D and the ready state (READY) E. The second route is the terminate 1
15 state (TERMINATE 1) N, the initialize 1 state (INITIALIZE 1) C, the initialize 2 state (INITIALIZE 2) D, and the ready state (READY) E. The third route is the terminate 1 state (TERMINATE 1) N, the terminate 0
20 state (TERMINATE 0) O, and the exit state (EXIT) P.

Fig. 17 is a flow chart for explaining the initializing process in the case that an abnormality takes place. This process gets started when an
interrupt message is received. Each process portion
25 determines whether or not it has received a (INT, QUT) message as an interrupt message. When the determined result represents that the received interrupt message

is a (INT, QUT) message, the flow advances to step S352. The process portion advances to the initialize 2 state (INITIALIZE 2) D at step S352. In the state, as in the case at step S204 shown in Fig. 10, an initializing process for the first buffer is performed. Thereafter, the process portion advances to the ready state (READY) E.

Thus, each process portion does not complete the process (not advance to the exit state (EXIT) P), but only initializes the first buffer and advances to the ready state (READY) E. Thus, an overhead for regenerating a process portion that has been completed is not required to perform an encoding process.

In addition, when an abnormality takes place due to any cause, it can be expected that by initializing the first buffer, the process can be restored from the abnormality. The first path of the process can be completed in shorter time than a second path of the process (that will be described later). Thus, the process can be more quickly restored from an abnormality.

When the determined result at step S351 represents that the interrupt message is not a (INT, QUT) message, the flow advances to step S353. The process portion determines whether or not the interrupt message is a (INT, RST) message at step S353. When the interrupt message is a (INT, RST) message, the flow

advances to step S354. The process portion advances to the terminate 1 state (TERMINATE 1) N at step S354. In this state, the process portion performs an unallocating process for the second buffer.

5 Next, the flow advances to step S355. The process portion advances to the initialize 1 state (INITIALIZE 1) C at step S355. In this state, as in the case at step S203 shown in Fig. 10, the process portion executes processes for allocating the second buffer, initializing it, and initializing a register.

10 Thereafter, the flow advances to step S356. The process portion advances to the initialize 2 state (INITIALIZE 2) D. In this state, as in the case at step S352, the process portion executes an initializing process for the first buffer.

15 Thereafter, the process portion advances to the ready state (READY) E.

20 Thus, in the second path of the initializing process, since the initializing process are performed in other states including the states of the first path of the initializing process, the second path of the initializing process takes longer time than the first path of the initializing process. However, the second path of the initializing process allows the process to be restored from an abnormality more accurately than

25 the first path of the initializing process.

When the determined result at step S353

represents that the interrupt message is not a (INT, RST) message, the interrupt message is a (INT, TRM) message. Thus, in this case, the flow advances to step S357. The process portion advances to the terminate 1 state (TERMINATE 1) N at step S357. In the state, as in the case at step S354, the process portion performs an unallocating process for the second buffer.

Thereafter, the flow advances to step S358. The process portion advances to the terminate 0 state (TERMINATE 0) O at step S358. In this state, the process portion performs an unallocating process for the first buffer and a process for closing the device.

Thereafter, the process portion advances to the exit state (EXIT) P. In this state, the real time OS stops. Thereafter, the power of the terminal unit is turned off.

The third path is performed when the process cannot be restored from an abnormality in the first path and the second path of the initializing process. In this case, the real time OS re-starts. A process for re-generating each process portion is performed. Thus, the third path of the initializing process takes longer time than the first path or the second path of the initializing process. However, the third path of the initializing process allows the process to be restored from an abnormality more accurately than the first path or the second path of the initializing

process.

Fig. 18 shows a time sequence of the first path, the second path, and the third path of the initializing process.

5 For example, when an abnormality takes place,
the main application 153 outputs a (INT, QUT) message
to the encoding process manager 181 at step S411. When
the encoding process manager 181 receives the (INT,
QUT) message, the encoding process manager 181 advances
10 to the initialize 2 state (INITIALIZE 2) D at step S421.
In the initialize 2 state (INITIALIZE 2) D, the
encoding process manager 181 executes the initializing
process for the first buffer. The encoding process
manager 181 advances to the ready state (READY) E at
15 step S422. The encoding process manager 181 notifies
the main application 153 whether or not the process has
been restored from an abnormality in the first path of
the initializing process at step S423.

20 When the process has not been restored from
an abnormality in the first path of the initializing
process, the main application 153 outputs a (INT, RST)
message to the encoding process manager 181 at step
S412. When the encoding process manager 181 receives
the (INT, RST) message from the main application 153,
25 the encoding process manager 181 advances to the
terminate 1 state (TERMINATE 1) N at step S423. The
encoding process manager 181 performs an unallocating

process for the second buffer at step S424. Thereafter,
the encoding process manager 181 advances to the
initialize 1 state (INITIALIZE 1) C at step S425. In
the initialize 1 state (INITIALIZE 1) C, the encoding
process manager 181 performs an allocating process for
the second buffer, an initializing process for the
second buffer, and an initializing process for a
register.

The encoding process manager 181 advances to
the initialize 2 state (INITIALIZE 2) D at step S426.
In the initialize 2 state (INITIALIZE 2) D, the
encoding process manager 181 executes an initializing
process for the first buffer. The encoding process
manager 181 returns to the ready state (READY) E at
step S427. The encoding process manager 181 notifies
the main application 153 whether or not the process has
been restored from an abnormality in the second path of
the initializing process at step S428.

When the determined result at step S428
represents that the process has not been restored from
an abnormality in the second path of the initializing
process, the main application 153 outputs a (INT, TRM)
message to the encoding process manager 181 at step
S413.

When the encoding process manager 181
receives the (INT, TRM) message from the main
application 153, the encoding process manager 181

advances to the terminate 1 state (TERMINATE 1) N at step S429. In the terminate 1 state (TERMINATE 1) N, the encoding process manager 181 performs an unallocating process for the second buffer. The encoding process manager 181 advances to the terminate 0 state (TERMINATE 0) O at step S430. In the terminate 0 state (TERMINATE 0) O, the encoding process manager 181 performs an unallocating process for the first buffer and performs a process for closing the device.

The encoding process manager 181 advances to the ready state (READY) E at step S431. In the ready state (READY) E, the encoding process manager 181 notifies the main application 153 whether or not the process has been restored from an abnormality in the third path of the initializing process at step S432.

When the determined result represents that the process has not been restored from an abnormality in the third path of the initializing process, the main application 153 requests the real time OS to re-start at step S414.

The real time OS executes the re-start process corresponding to the request received from the main application 153 at step S401.

Thereafter, the real time OS executes a process for generating the encoding process manager 181 at step S402. Thus, at steps S201 to S205 shown in Fig. 10, the encoding process manager 181 advances to the

ready state (READY) E through the execute state (EXECUTE) A, the initialize 0 state (INITIALIZE 0) B, the initialize 1 state (INITIALIZE 1) C, and the initialize 2 state (INITIALIZE 2) D.

5 Thus, since there are three paths of the initializing process that are successively performed in such a manner that the initializing process is quickly completed, the encoding process can be more quickly restored from an abnormality.

10 In each state other than the receive states (RECEIVE) F and L, the send states (SEND) I and J, a message cannot be received. Thus, in each of those states, even if an abnormality takes place and the process in the current state cannot be completed, the process may not be restored from the abnormality. In addition, in each of the receive states (RECEIVE) F and L and the send states (SEND) I and J, when an abnormality takes place, even if a predetermined message is received, the current state may not advance to another state. In such a situation, as was described above, in each state, an interrupt message can be accepted so that the current process can be restored from an abnormality.

20 As was described above, when the header of a inter process portion communication message contains MSGT = INT (INTERRUPT), as with a system call SIGNAL of the UNIX, an exception signal (asynchronous signal)

causes each process portion to advance to the initialize 1 state (INITIALIZE) (initialize 1 states (INITIALIZE 1) C and D) and the terminate 1 state (TERMINATE) (terminate 1 states (TERMINATE 1) N and O).

5 As a result, when environmental variables are pre-saved, the current process portion can securely return to the preceding state.

Fig. 19 shows an example of another structure of the delivery side of the music delivery service system according to the present invention. For simplicity, in Fig. 19, similar portions to those in Fig. 2 are denoted by similar reference numerals and their description is omitted.

10 A terminal unit 200 is connected to an alarm LAN 101 and a medium LAN 102. The terminal unit 200 receives PCM non-compressed music data from a server 113. The terminal unit 200 encodes the received PCM non-compressed music data and supplies the encoded data to the server 113. In other words, the terminal unit 15 200 also has the function of the encoder 112 along with the function of the terminal unit 111 shown in Fig. 2.

Fig. 20 shows an example of the structure of the terminal unit 200. The terminal unit 200 is composed of for example a computer. An input - output interface 516 is connected to a CPU 511 through a bus 25 515. When the user inputs a command from an inputting portion 518 composed of a keyboard, a mouse, and so

forth to the CPU 511, the CPU 511 loads a program stored in a ROM 512, a hard disk 514, or a record medium such as a magnetic disk 531, an optical disc 532, a magneto-optical disc 533, or a semiconductor memory 534 to a RAM 513 and executes the program with the RAM 513. In addition, when necessary, the CPU 511 outputs the processed result to a displaying portion 517 composed of for example an LCD through the input - output interface 516.

The program can be pre-stored to the hard disk 514 or the ROM 512. The program can be provided along with the terminal unit 200. In addition, the program can be provided as a package medium such as the magnetic disk 531, the optical disc 532, the magneto-optical disc 533, the semiconductor memory 534, or the like. Alternatively, the program can be provided from a satellite, a network, or the like to the hard disk 514 through a communicating portion 519.

It is preferred that the semiconductor memory 534 is a non-volatile memory such as a flash memory. In addition, it is preferred that the package medium that contains the semiconductor memory 534 that has a microcomputer and can authenticate the reading and writing operations to / from the semiconductor memory 534. The semiconductor memory 534 is for example memory stick (trademark), SD memory card (trademark), compact flash (trademark), smart media (trademark),

multimedia card (trademark), micro drive (trademark),
ID format (trademark), or thumb drive (trademark).

Fig. 21 shows an example of the structure of
the program that is loaded to the RAM 513 of the
terminal unit 200 and executed by the CPU 511. The
terminal unit 200 further comprises the control process
portion W of the terminal unit 111 shown in Fig. 2 and
the music data input - output capsule 155 and the
encoding process capsule 156 of the encoder 112 shown
in Fig. 6. In such a structure, the terminal unit 200
can execute the same encoding process as the terminal
unit 111.

In this case, the process performed by the
data input - output manager 171 against the control
process portion W is capsulated as the music data input
- output capsule 155. Likewise, the process executed
by the encoding process manager 181 is capsulated as
the encoding process capsule 156.

In this case, various processes including the
initializing process in the case that an abnormality
takes place are executed corresponding to the above-
described state transition diagram. These processes
are basically the same as those of the above-described
case. Thus, their description is omitted.

In this specification, the steps that
describe the program provided by a medium may be
executed in the given sequential order. Alternatively,

the steps may be executed in parallel or discretely.

Moreover, in this specification, the term "system" means an apparatus composed of a plurality of units and / or means.

5 Industrial Applicability

10 The present invention is a record medium for recording a computer controllable program, the program being disposed between a controlling portion and hardware, the program controlling the hardware
15 corresponding to a message received from the controlling portion, the program comprising a first process portion for communicating with the controlling portion, a second process portion for being communicable with first hardware and second hardware, a
20 third process portion for communicating with the first process portion and the second process portion and executing an interfacing process corresponding to the first hardware, and a fourth process portion for communicating with the first process portion and the
25 second process portion and executing an interfacing process corresponding to the second hardware, wherein the first process portion outputs a message to one of the third process portion and the fourth process portion corresponding to a message received from the controlling portion.

Thus, in any case, even if hardware is changed, it is not necessary to change the controlling

portion. Even in the worst case, the change performed for the controlling portion is minor. One controlling portion can be used in common with many hardware devices.

5 The present invention is a storage medium for storing a computer controllable program, disposed between a controlling portion and hardware, for controlling the hardware corresponding to a message received from the controlling portion, the program containing capsulated process portions, wherein if an
10 abnormality takes place in each process portion, it is initialized in one of a first path for initializing a first buffer for exchanging data with the hardware, a second path for unallocating a second buffer for
15 exchanging data with the controlling portion, allocating the second buffer, initializing the second buffer, and initializing the first buffer, and a third path for unallocating the second buffer and
20 unallocating the first buffer.

 Thus, each process portion can be quickly restored from an abnormality.

CLAIMS

1. A record medium for recording a computer controllable program, the program being disposed between a controlling portion and hardware, the program controlling the hardware corresponding to a message received from the controlling portion, the program comprising:

a first process portion for communicating with the controlling portion;

a second process portion for being communicable with first hardware and second hardware;

a third process portion for communicating with the first process portion and the second process portion and executing an interfacing process corresponding to the first hardware; and

a fourth process portion for communicating with the first process portion and the second process portion and executing an interfacing process corresponding to the second hardware,

wherein the first process portion outputs a message to one of the third process portion and the fourth process portion corresponding to a message received from the controlling portion.

2. The record medium as set forth in claim 1, wherein the program further comprises:

a fifth process portion for communicating with the controlling portion, and

wherein the fifth process portion acquires data that is processed by the hardware corresponding to a message received from the controlling portion.

3. The record medium as set forth in claim 2,

5 wherein the controlling portion includes a main application process portion.

4. The record medium as set forth in claim 3,

10 wherein the fifth process portion of the program receives a message that designates the stored location of data from the main application process portion,

wherein the fifth process portion acquires data that is processed by the hardware corresponding to the stored location of the data,

15 wherein the first process portion receives a message that designates an encoding process type from the main application process portion,

20 wherein one of the third process portion and the fourth process portion receives the message from the first process portion corresponding to the encoding process type, and

25 wherein the first or second hardware that communicates with the second process portion encodes the acquired data corresponding to a communication result of one of the third process portion and the fourth process portion to the second process portion.

5. The record medium as set forth in claim 4,

wherein the program further comprises:

a data input - output manager process portion
for receiving a message that designates the stored
location of data received from the main application
process portion, the data input - output manager
process portion acquiring data that is processed by the
hardware corresponding to the stored location of the
data;

an encoding process manager process portion
for receiving the message that designates the encoding
process type from the main application process portion;
and

a first encode card input - output I/F
process portion and a second encode card input - output
I/F process portion, one of which receives the message
from the encoding process manager process portion
corresponding to the encoding process type,

wherein the first hardware or the second
hardware that communicates with the encode card driver
process portion encodes the acquired data corresponding
to a communication result of one of the first encode
card input - output I/F process and the second encode
card input - output I/F process to the encode card
driver process.

6. The record medium as set forth in claim 5,
wherein the encode card driver process
portion is communicable with a first encoder for

encoding audio data corresponding to ATRAC format and a second encoder for encoding audio data corresponding to MPEG Audio Layer 3 format.

7. The record medium as set forth in claim 1,
5 wherein each process portion is assigned priority.

8. The record medium as set forth in claim 1,
wherein if an abnormality takes place in each
process portion, the state thereof changes in one of a
10 first path, a second path, and a third path, the first
path including a first state to which each process
portion advances when it is generated, the second path
including a second state to which each process portion
advances when it is completed, a third state to which
15 each process portion advances when it is generated, and
the first state, the third pass including the second
state and a fourth state to which each process portion
advances when it is completed.

9. A record medium for recording a computer
20 controllable program, the program being disposed
between a controlling portion and hardware, the program
controlling the hardware corresponding to a message
received from the controlling portion, the program
comprising:

25 a first process portion for communicating
with the controlling portion;

a second process portion for being

communicable with a first software encoder and a second software encoder;

5 a third process portion for communicating with the first process portion and the second process portion and executing an interfacing process corresponding to the first software encoder; and

10 a fourth process portion for communicating with the first process portion and the second process portion and executing an interfacing process corresponding to the second software encoder,

wherein the first process portion outputs a message to one of the third process portion and the fourth process portion corresponding to a message received from the controlling portion.

15 10. An information processing apparatus, disposed between a controlling portion and hardware, for controlling the hardware corresponding to a message received from the controlling portion, comprising:

20 first means for communicating with the controlling portion;

second means for being communicable with first hardware and second hardware;

25 third means for communicating with said first means and said second means and executing an interfacing process corresponding to the first hardware; and

fourth means for communicating with said

first means and said second means and executing an
interfacing process corresponding to the second
hardware,

wherein said first means outputs a message to
one of said third means and said fourth means
corresponding to a message received from the
controlling portion.

11. The information processing apparatus as set
forth in claim 10, further comprising:

fifth means for communicating with the
controlling portion,

wherein said fifth means acquires data that
is processed by the hardware corresponding to a message
received from the controlling portion.

12. The information processing apparatus as set
forth in claim 11,

wherein said fifth means receives a message
that designates the stored location of data from the
controlling portion and acquires data that is processed
by the hardware corresponding to the stored location of
the data,

wherein said first means receives a message
that designates an encoding process type from the
controlling portion,

wherein one of said third means and said
fourth means receives the message from said first means
corresponding to the encoding process type, and

wherein the first or second hardware that communicates with said second means encodes the acquired data corresponding to a communication result of one of said third means and said fourth means to said second means.

13. An information processing method for controlling hardware corresponding to a message received from a controlling portion, comprising the steps of:

acquiring data that is processed by the hardware corresponding to a message that designates the stored location of data received from the controlling portion;

executing an interfacing process for a first encoder or a second encoder corresponding to a message that designates an encoding process type, the message being received from the controlling portion;

sending a message that has been interface-processed to the first encoder or the second encoder; and

causing the first encoder or the second encoder to encode the acquired data corresponding to the message that has been interface-processed.

14. A storage medium for storing a computer controllable program, disposed between a controlling portion and hardware, for controlling the hardware corresponding to a message received from the

controlling portion, the program containing capsulated process portions,

wherein if an abnormality takes place in each process portion, it is initialized in one of a first path for initializing a first buffer for exchanging data with the hardware, a second path for unallocating a second buffer for exchanging data with the controlling portion, allocating the second buffer, initializing the second buffer, and initializing the first buffer, and a third path for unallocating the second buffer and unallocating the first buffer.

15. The storage medium as set forth in claim 14, wherein when each process portion is initialized in the first path, if the process portion is not restored from the abnormality, the process portion is initialized in the second path.

16. The storage medium as set forth in claim 15, wherein when each process portion is initialized in the second path, if the process portion is not restored from the abnormality, the process portion is initialized in the third path.

17. The storage medium as set forth in claim 14, wherein when the message type of the message received from the controlling portion is an interrupt and the message number is QUIT, each process portion is initialized in the first path.

18. The storage medium as set forth in claim 14,

wherein when the message type of the message received from the controlling portion is an interrupt and the message number is RESET, each process portion is initialized in the second path.

5 19. The storage medium as set forth in claim 14, wherein each process portion has reply state, manage state, send state, receive state, and ready state.

10 20. A storage medium for storing a computer controllable program, disposed between a controlling portion and hardware, for controlling the hardware corresponding to a message received from the controlling portion, the program containing capsulated process portions,

15 wherein when an abnormality takes place in each process portion, it is initialized in one of a first path that contains a first initializing state to which the process portion advances when it is generated, a second path that contains a first completion state to which the process portion advances when it is completed, 20 a second initializing state to which the process portion advances when it is generated, and the first initializing state, and a third path that contains the first completion state and a second completion state to which the process portion advances when it is completed. 25

21. An information processing apparatus, disposed between a controlling portion and hardware, for

performing a process corresponding to a program that contains capsulated process portions for controlling the hardware corresponding to a message received from the controlling portion, comprising:

5 first initializing means that contains a first initializing state to which each process portion advances when it is generated;

 second initializing means that contains a first completion state to which the process portion advances when it is completed, a second initializing state to which the process portion advances when it is generated, and the first initializing state; and

10 third initializing means that contains the first completion state and a second completion state to which the process portion advances when it is completed,

15 wherein said first initializing means, said second initializing means, and said third initializing means are executed if an abnormality takes place in the process portion.

20 22. An information processing method, disposed between a controlling portion and hardware, for performing a process corresponding to a program that contains capsulated process portions for controlling the hardware corresponding to a message received from the controlling portion, comprising the steps of:

25 a first initializing step that contains a first initializing state to which each process portion

advances when it is generated;

a second initializing step that contains a first completion state to which the process portion advances when it is completed, a second initializing state to which the process portion advances when it is generated, and the first initializing state; and

a third initializing step that contains the first completion state and a second completion state to which the process portion advances when it is completed,

wherein the first initializing step, the second initializing step, and the third initializing step are executed if an abnormality takes place in the process portion.

Abstract

When the power is turned on, the real time OS gets started and a process portion is generated. The process portion starts at state A and advances to state B. In the state B, the process portion executes a capsule registering process. Thereafter, the process portion advances from the state B to state C. In the state C, the process portion executes a capsule resource allocating process. Thereafter, the process portion advances from the state C to state D. In the state D, the process portion executes an initializing process for the capsule including a device. The process portion advances to one of states E to M. The process portion determines whether or not a completion request message has been received. When a message other than the completion request message has been received, the process portion advances to a relevant state. In one of the states E to M, when the determined result represents that the completion request message has been received, the process portion advances to state N. In the state N, the process portion performs an unallocating process for a second buffer. Thereafter, the process portion advances to state O. In the state O, the process portion unallocates a first buffer and closes the device. Thereafter, the process portion advances to state P. In the state P, the real time OS is stopped and the

power is turned off.

Fig. 1

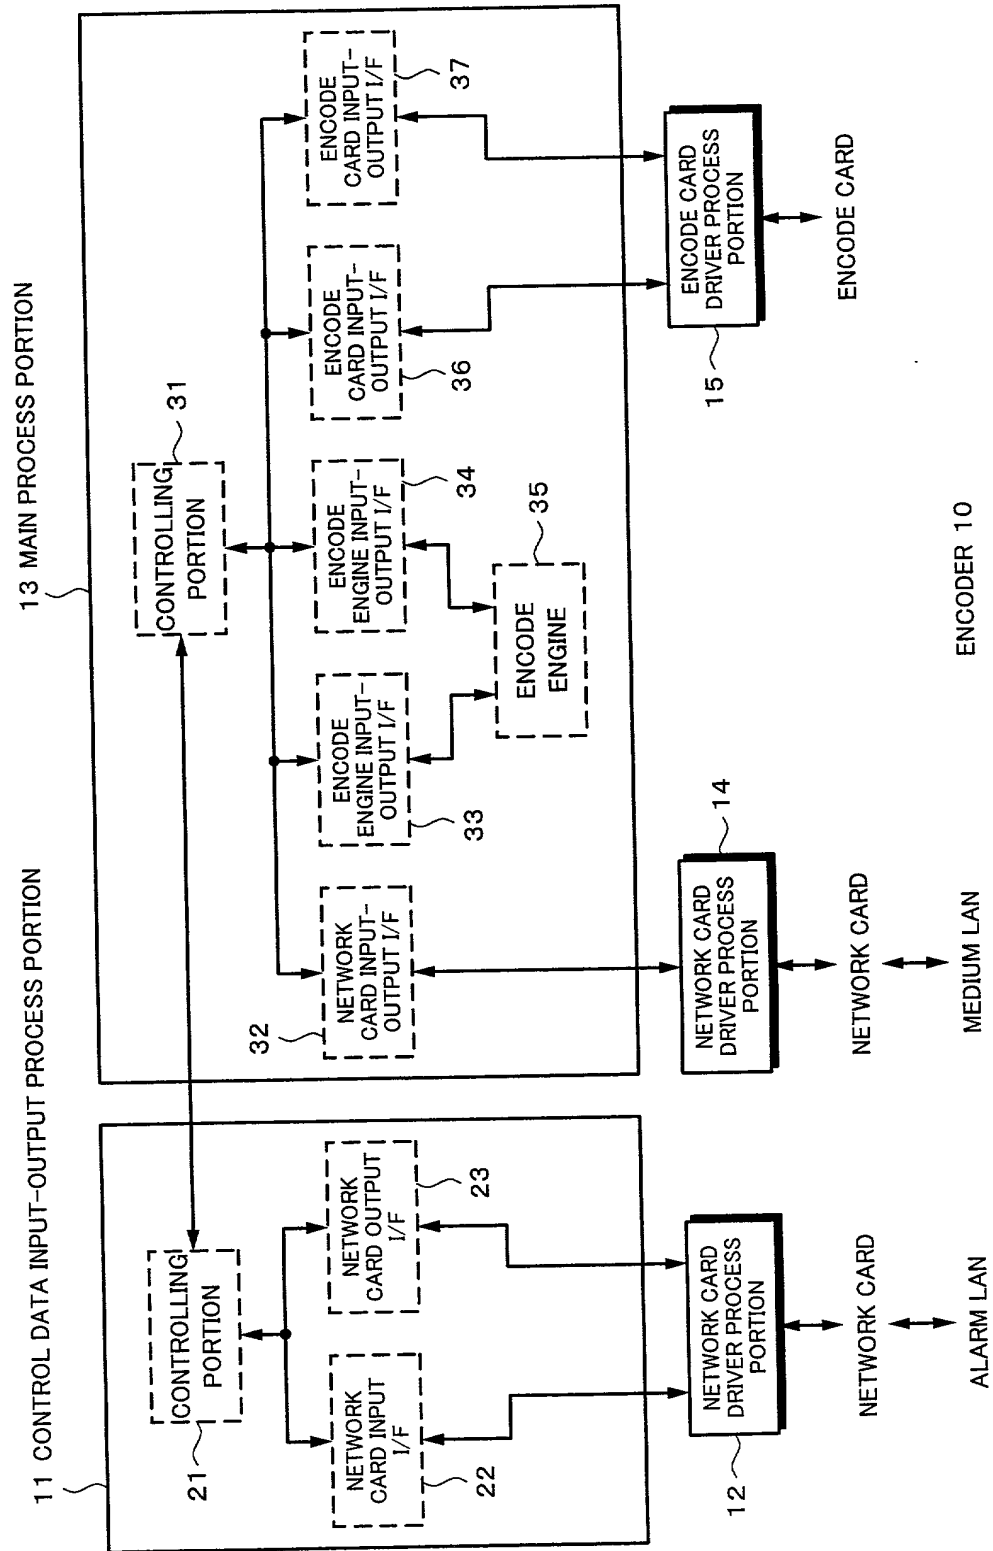


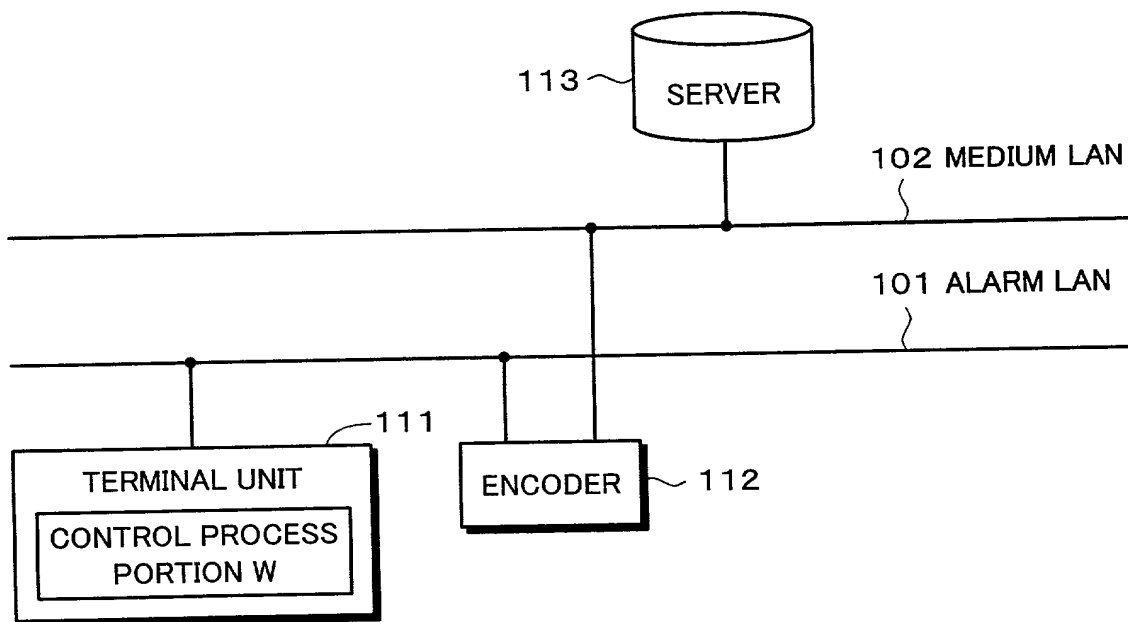
Fig. 2**MUSIC DELIVERY SERVICE SYSTEM**

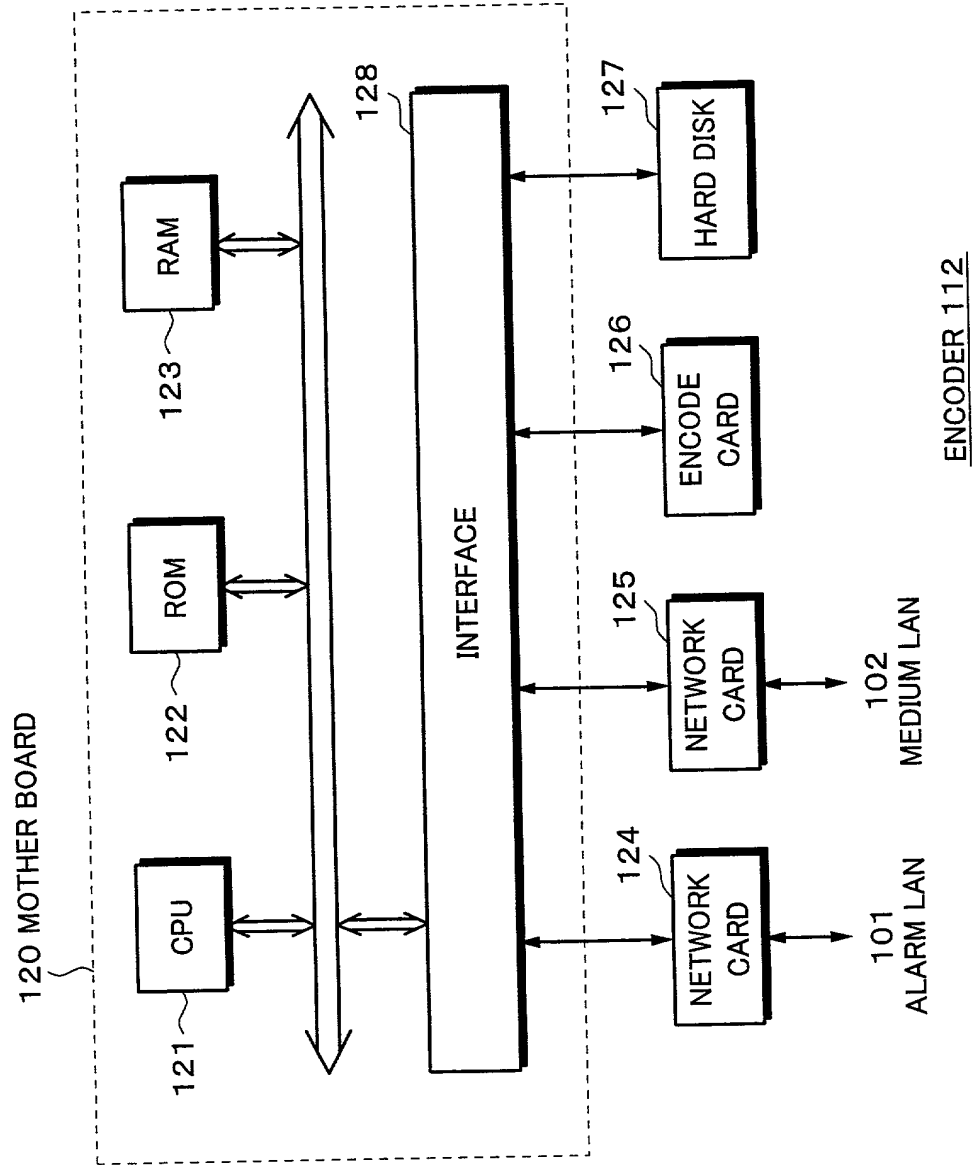
Fig. 3

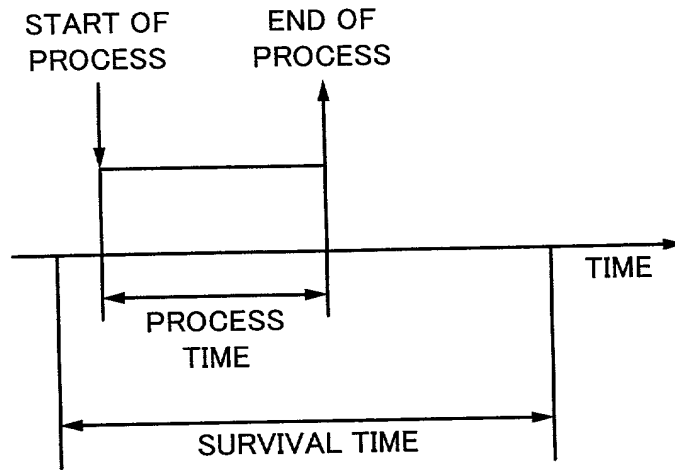
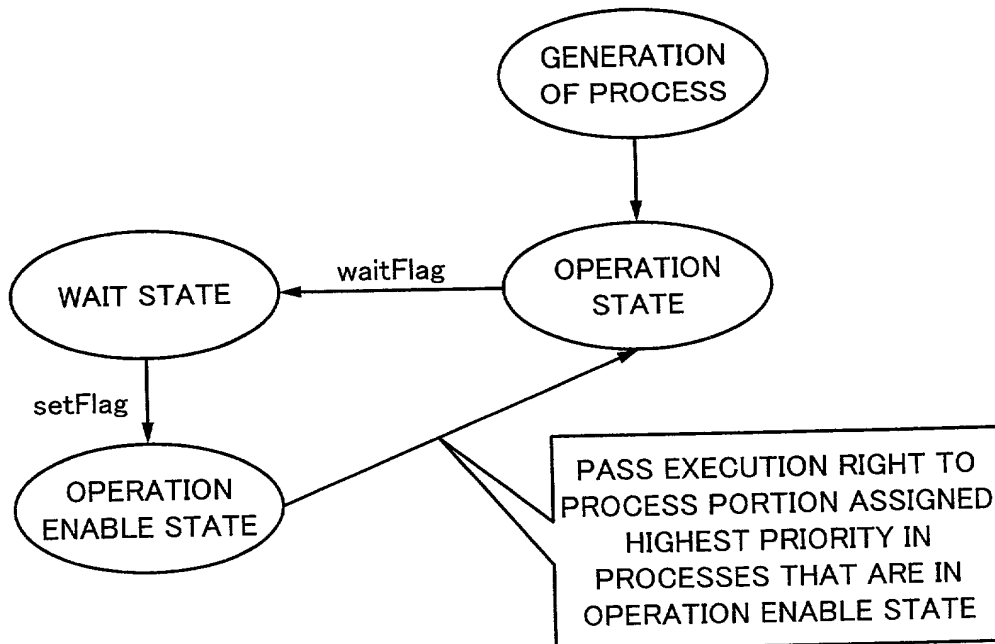
Fig. 4**Fig. 5**

Fig. 6

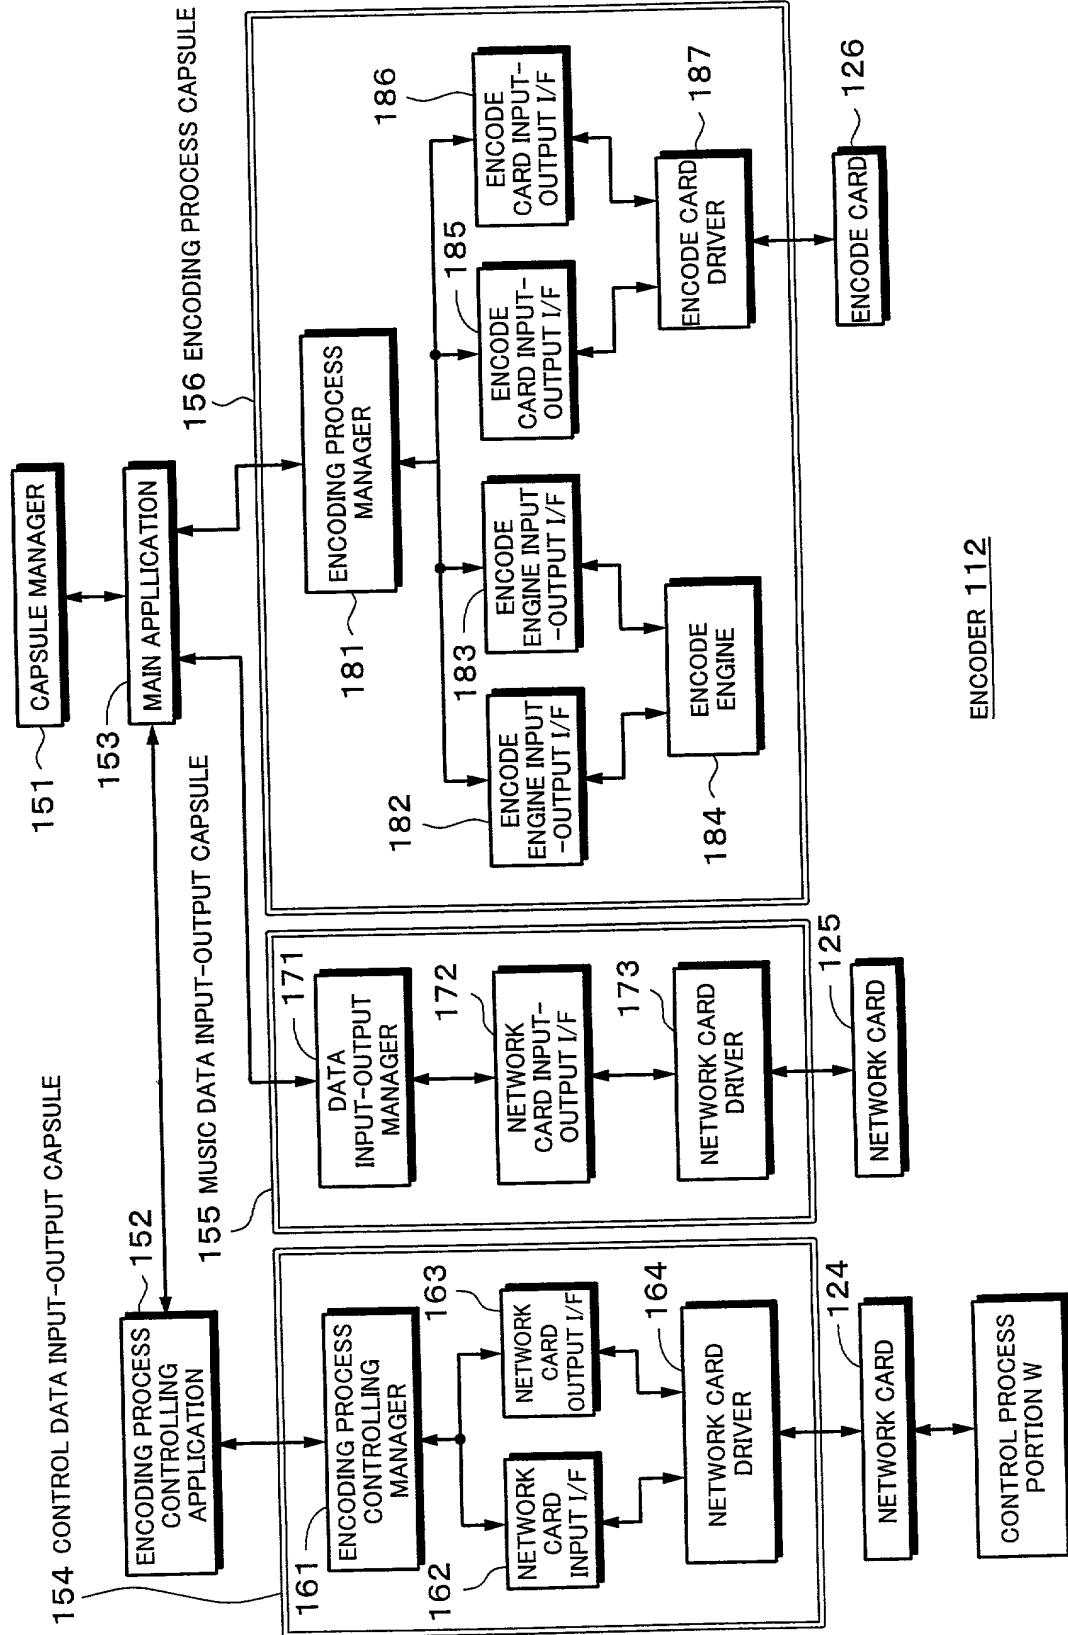


Fig. 7
Fig. 7A
Fig. 7B

Fig. 7A

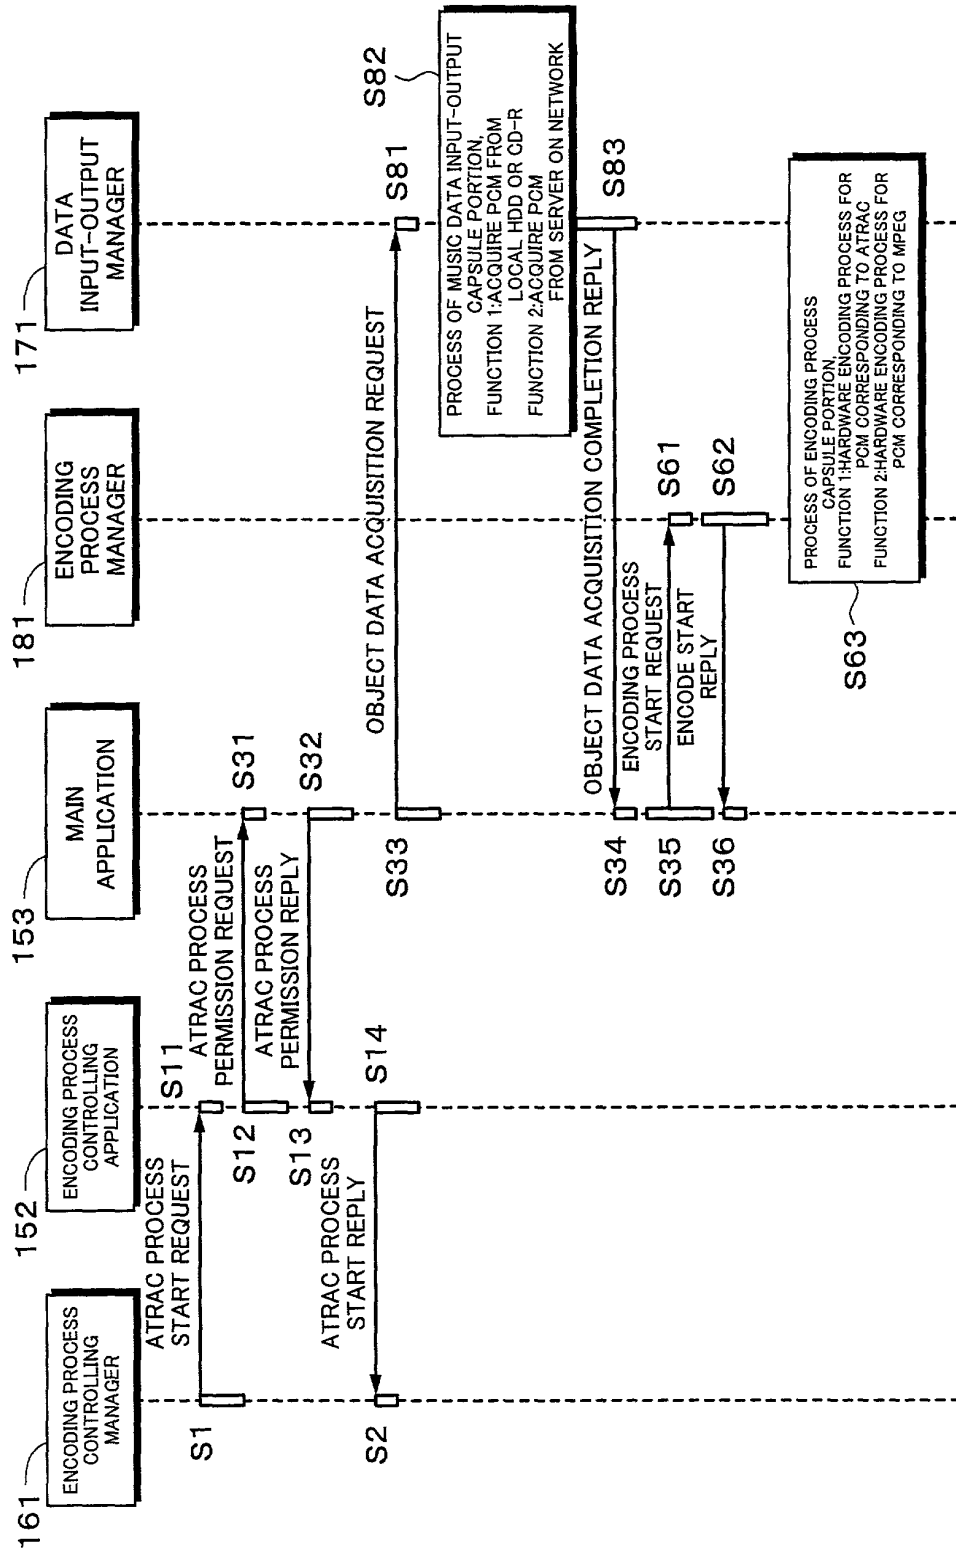


Fig. 7B

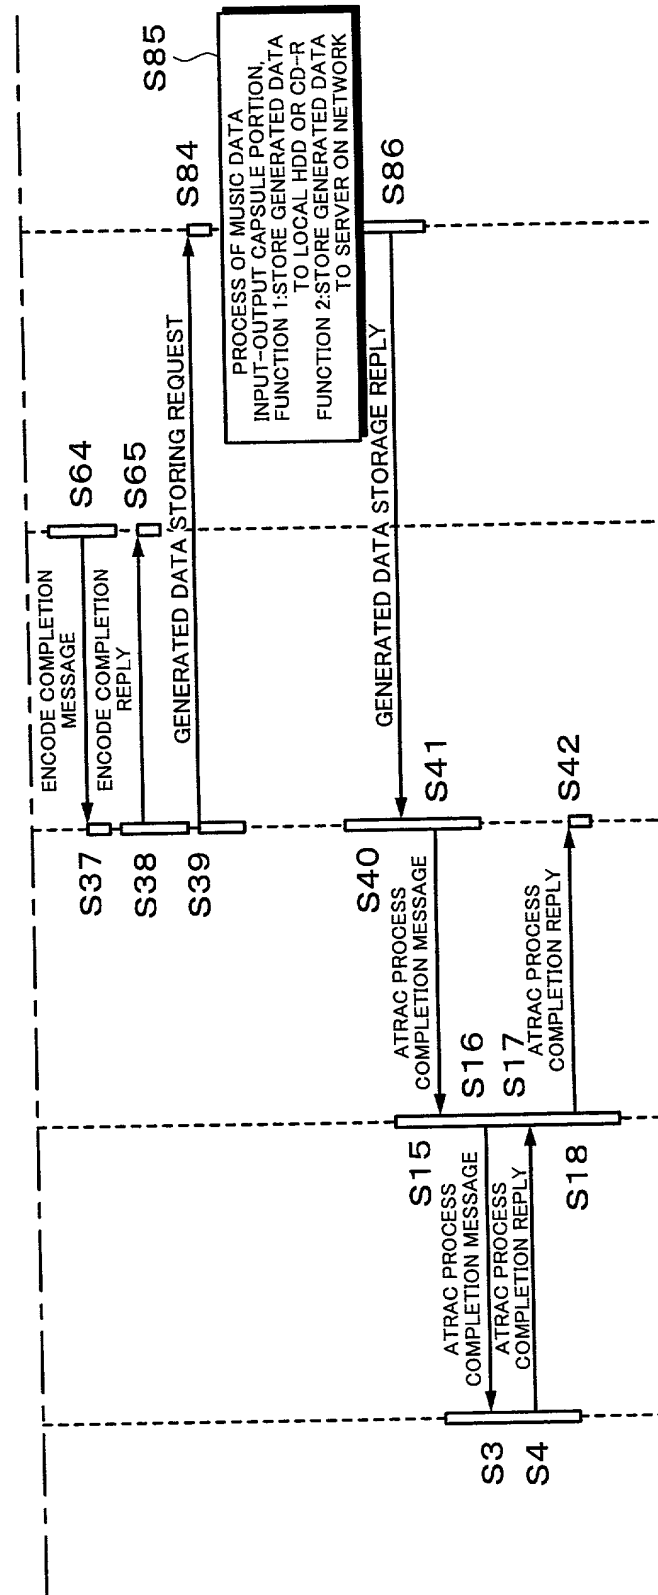


Fig. 8
Fig. 8A
Fig. 8B

Fig. 8A

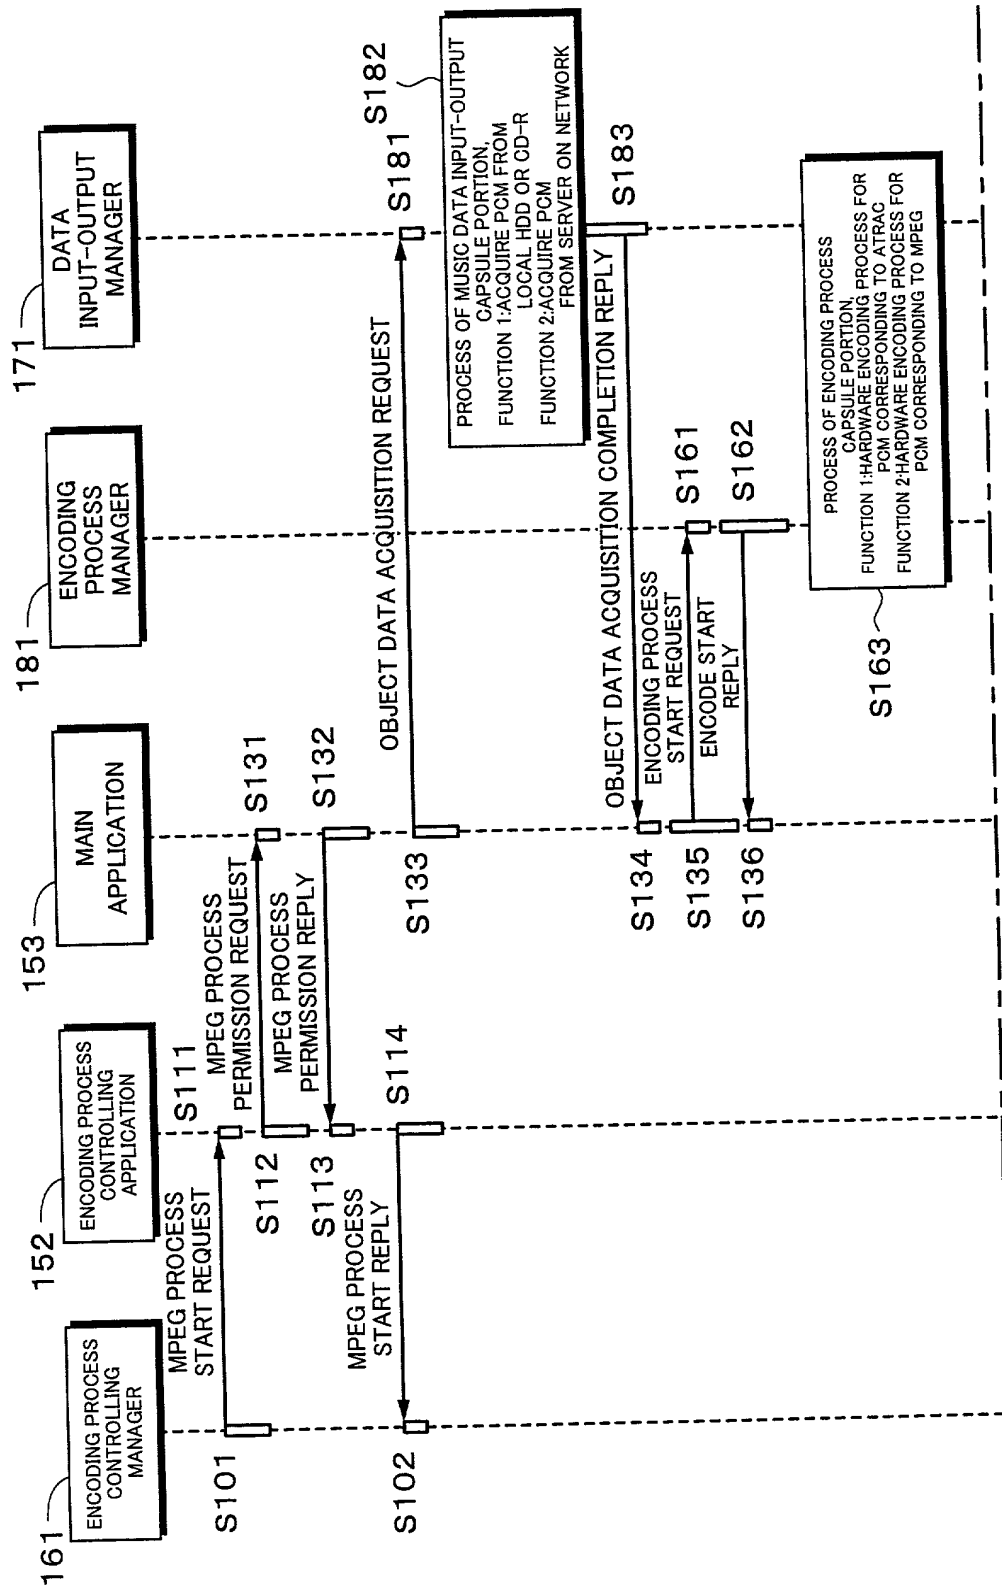


Fig. 8B

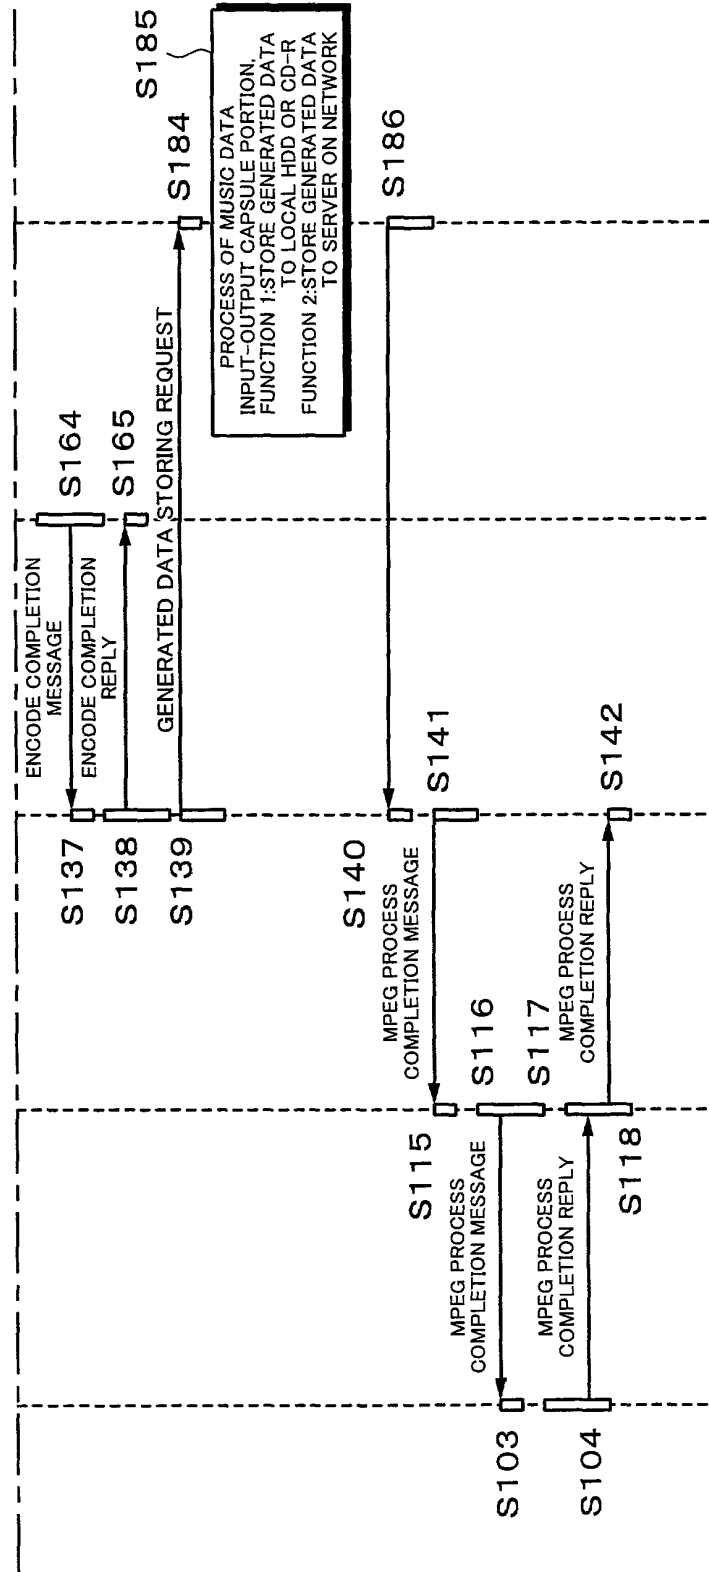


Fig. 9

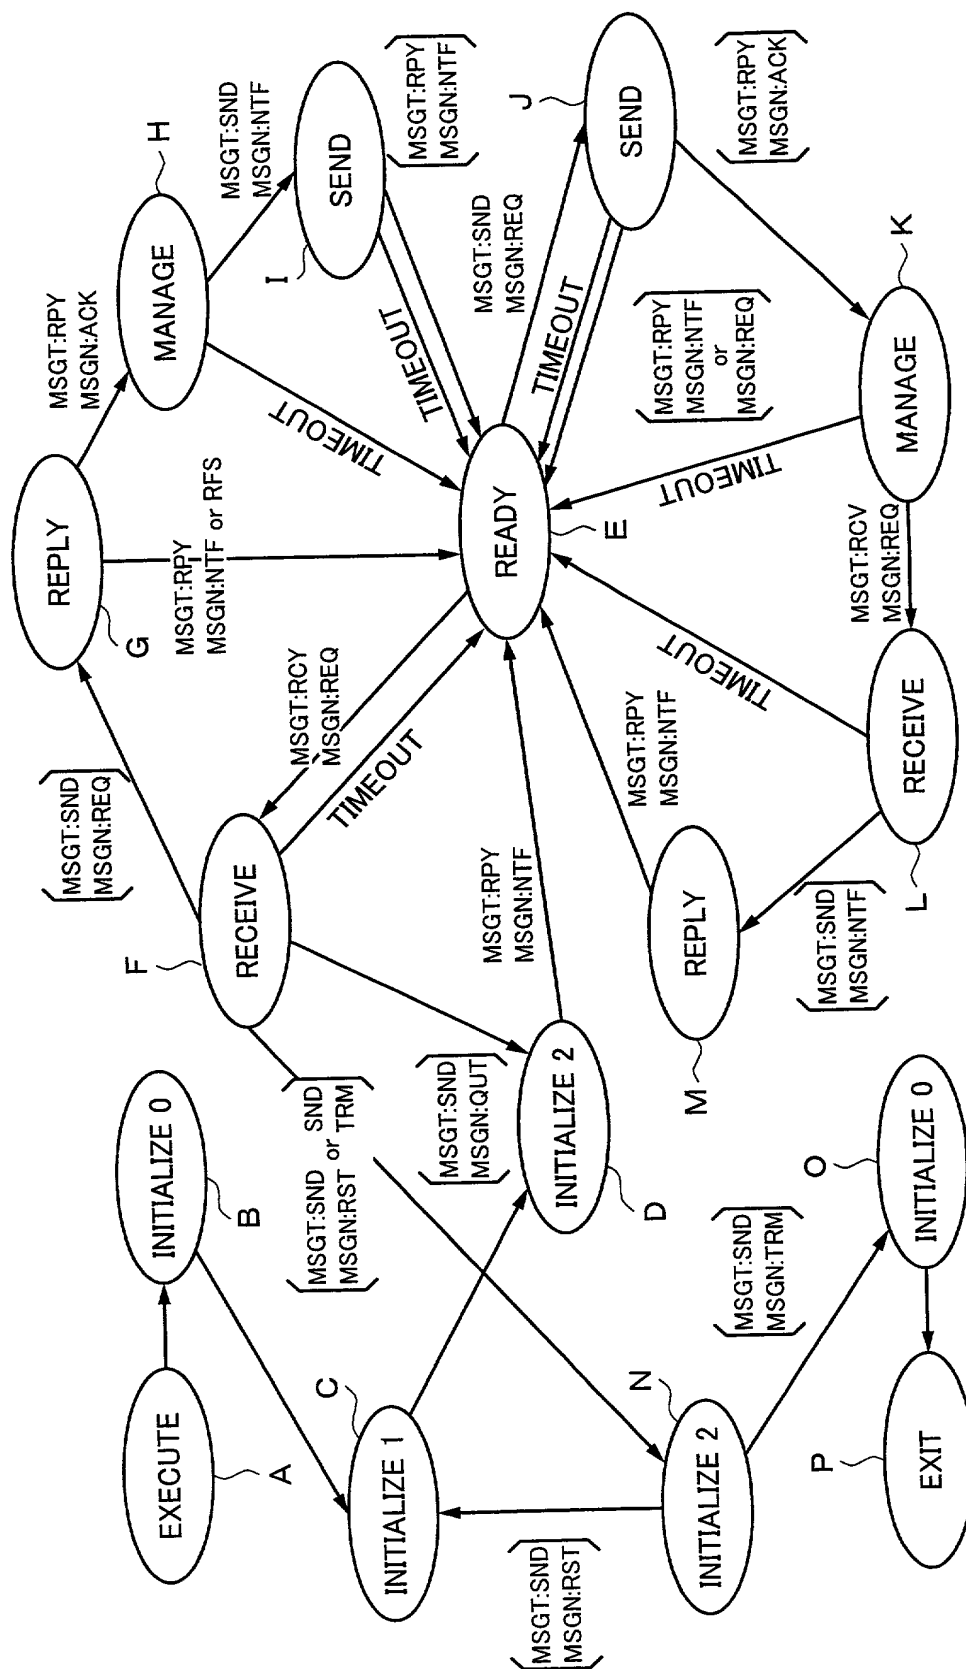


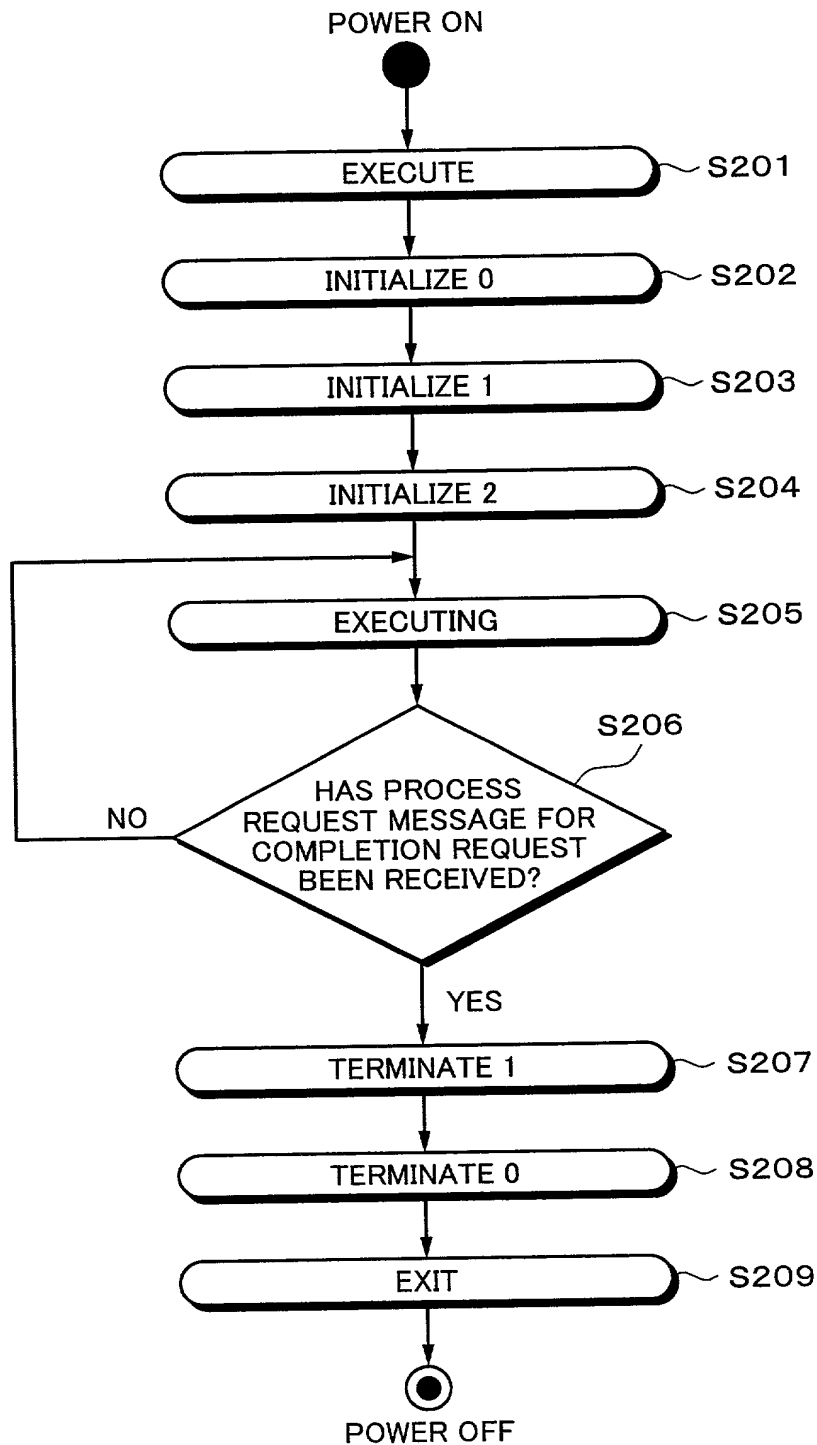
Fig. 10

Fig. 12A **Fig. 12B**

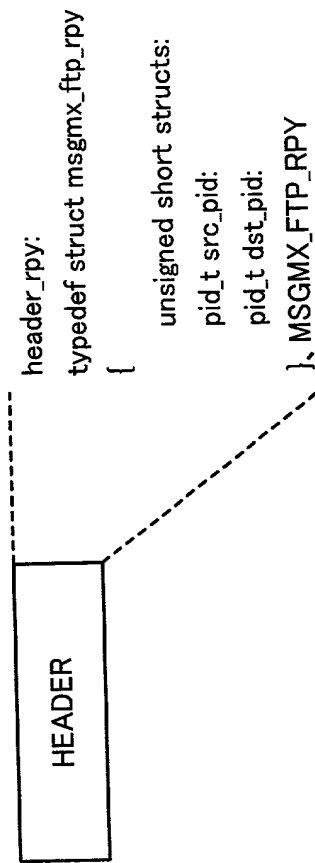


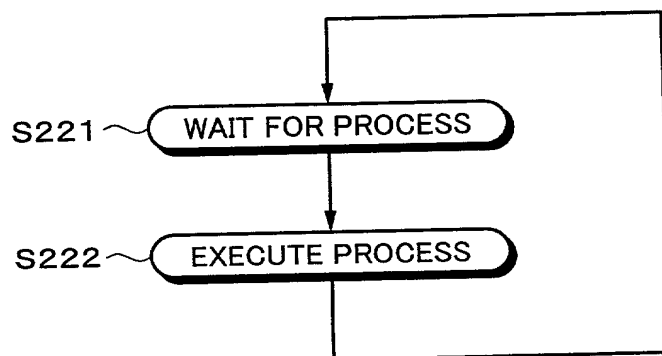
Fig. 13

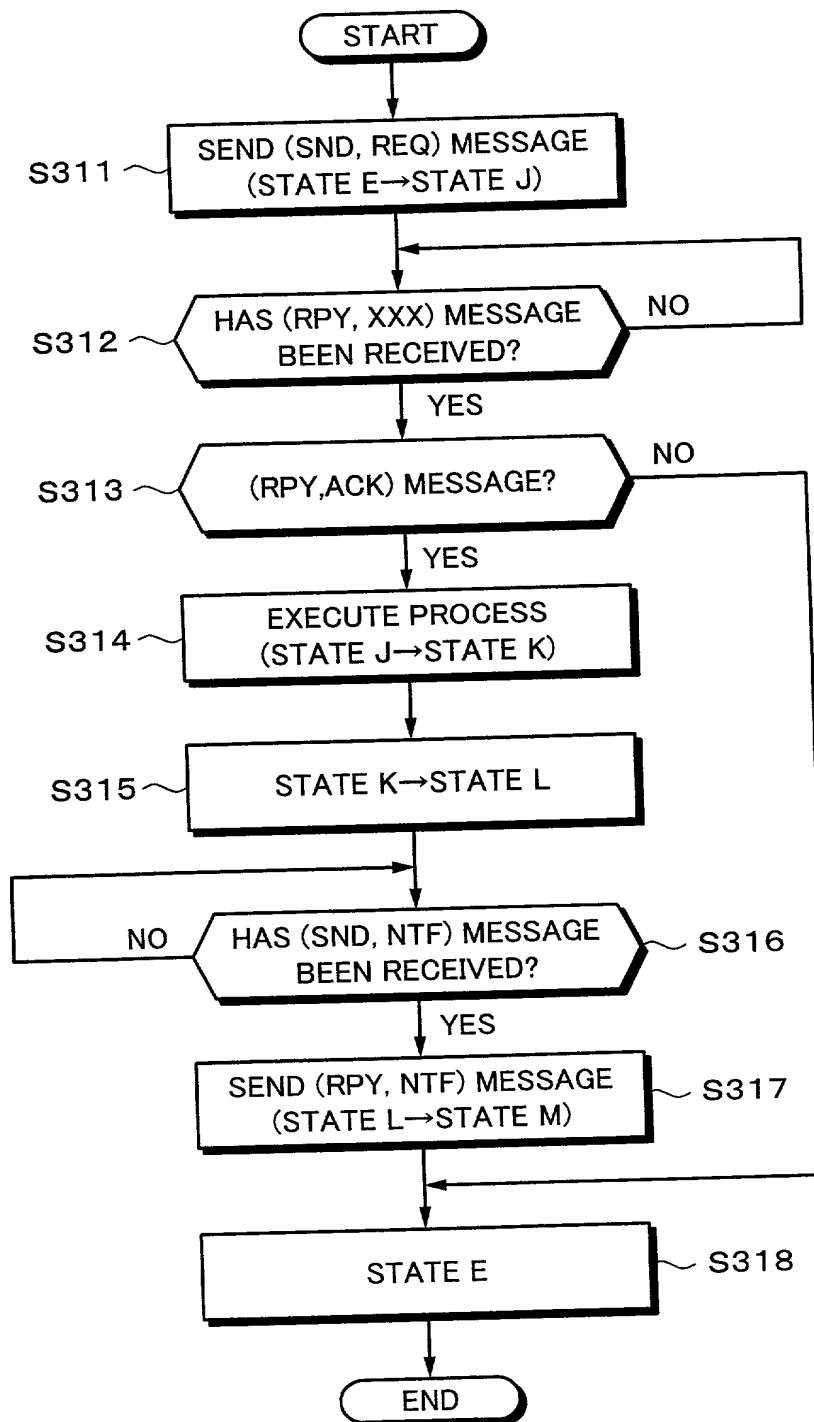
Fig. 14

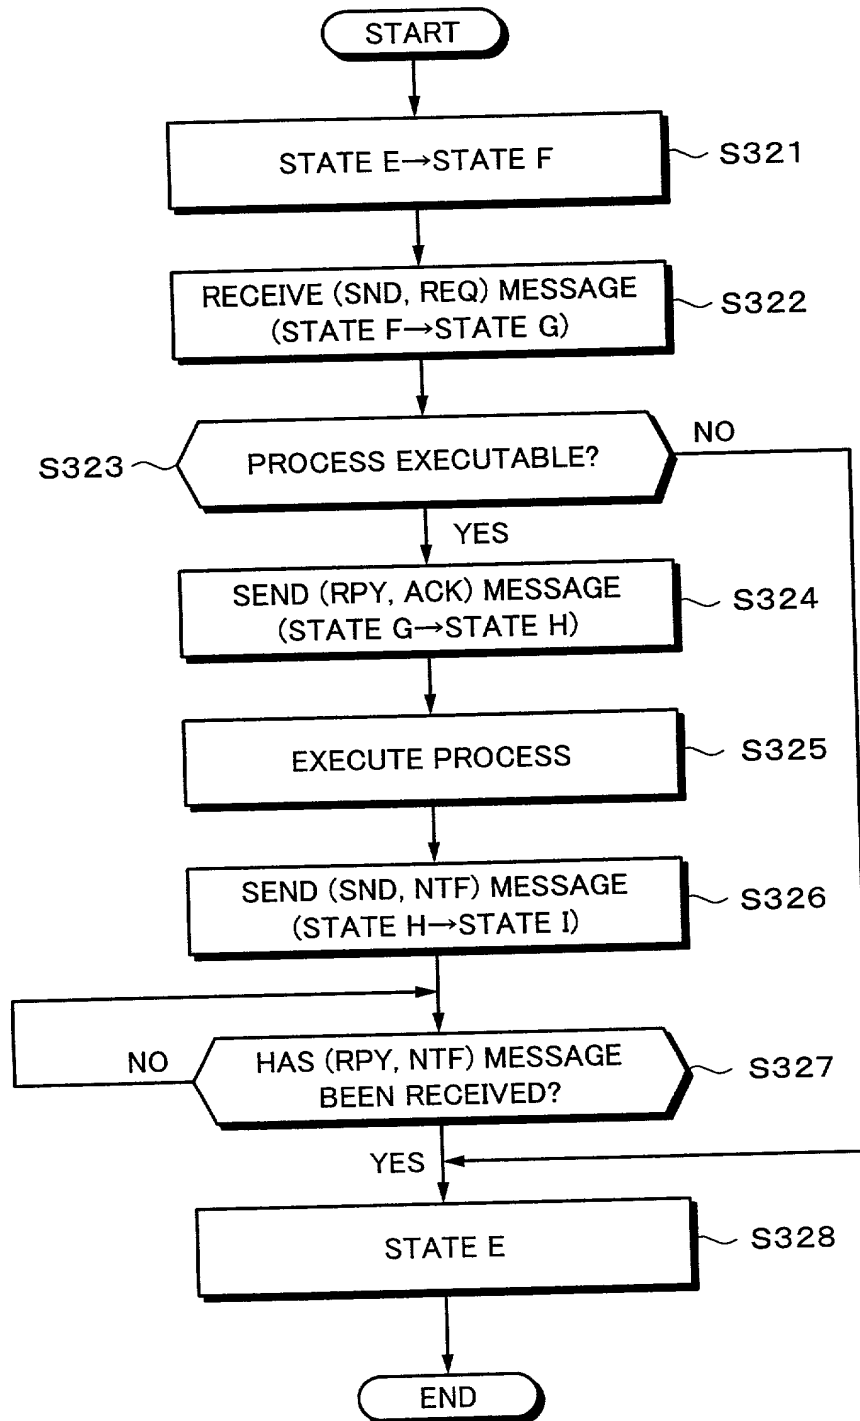
Fig. 15

Fig. 16

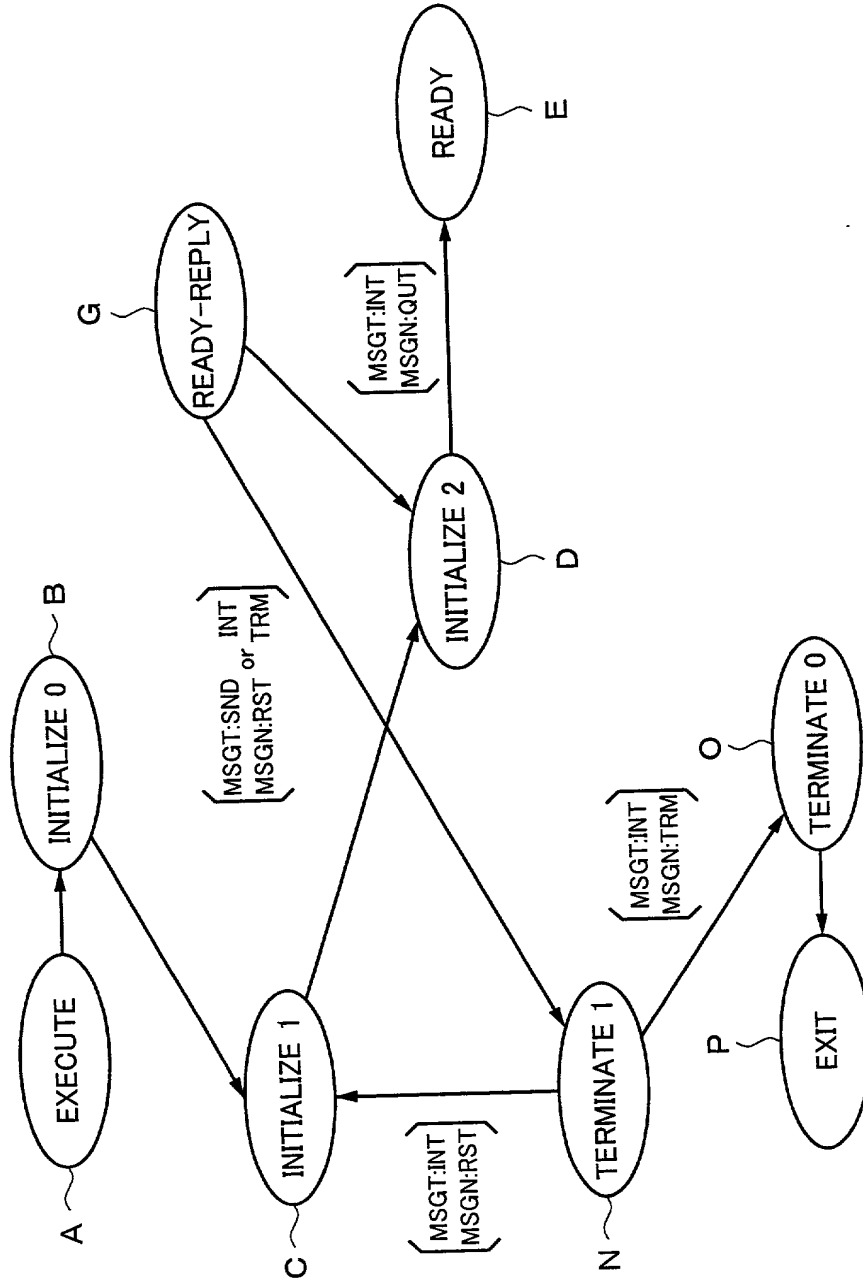


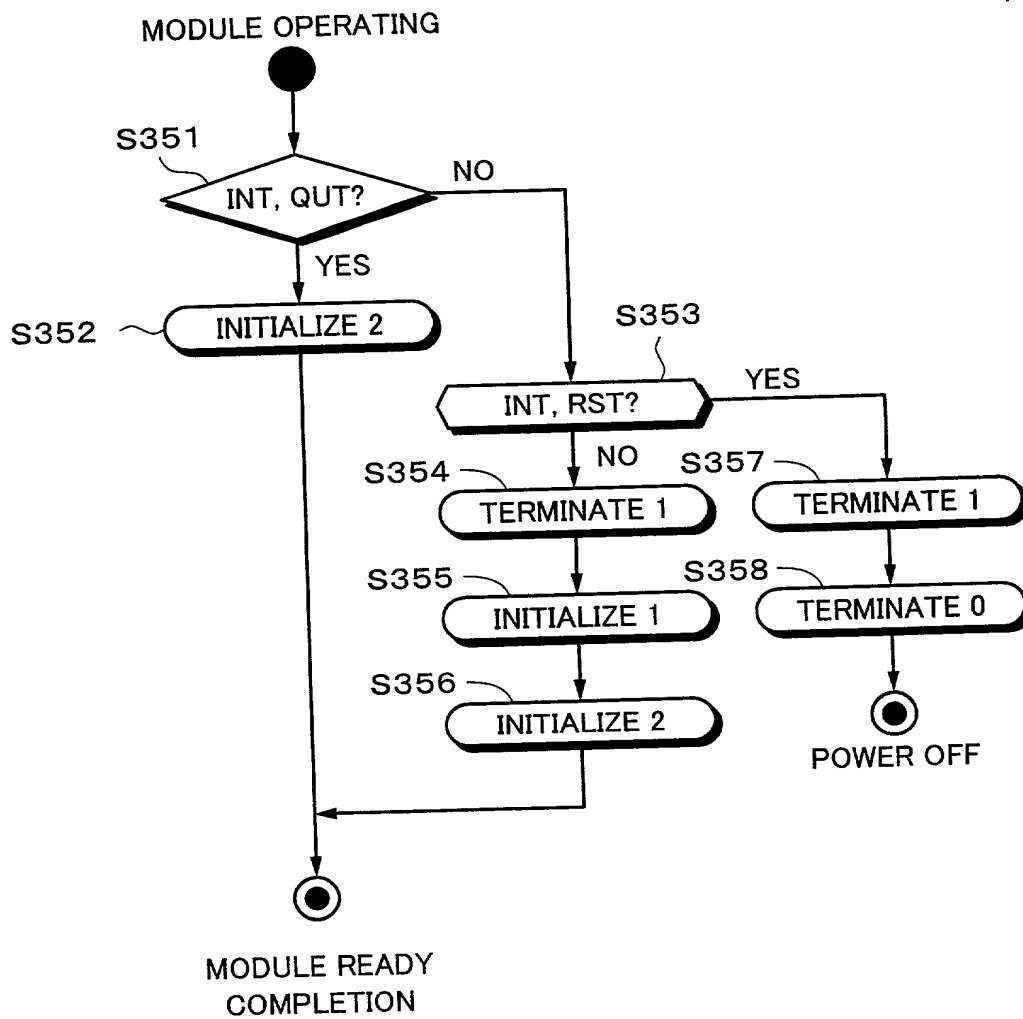
Fig. 17

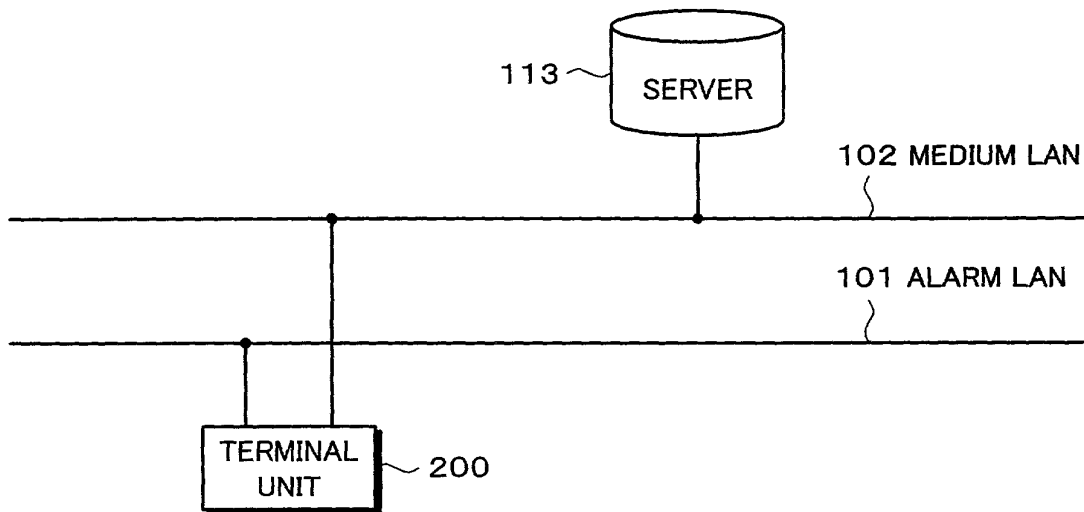
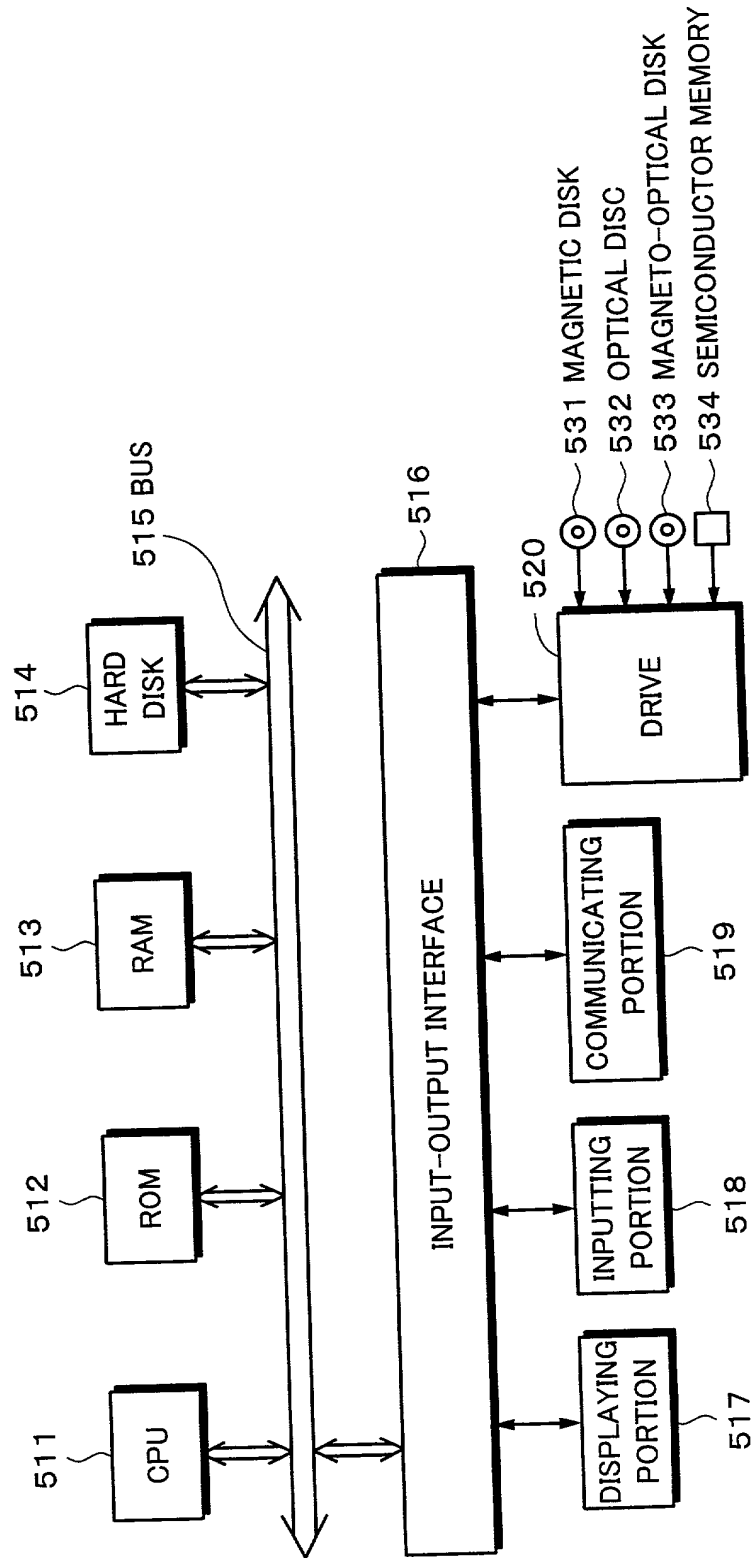
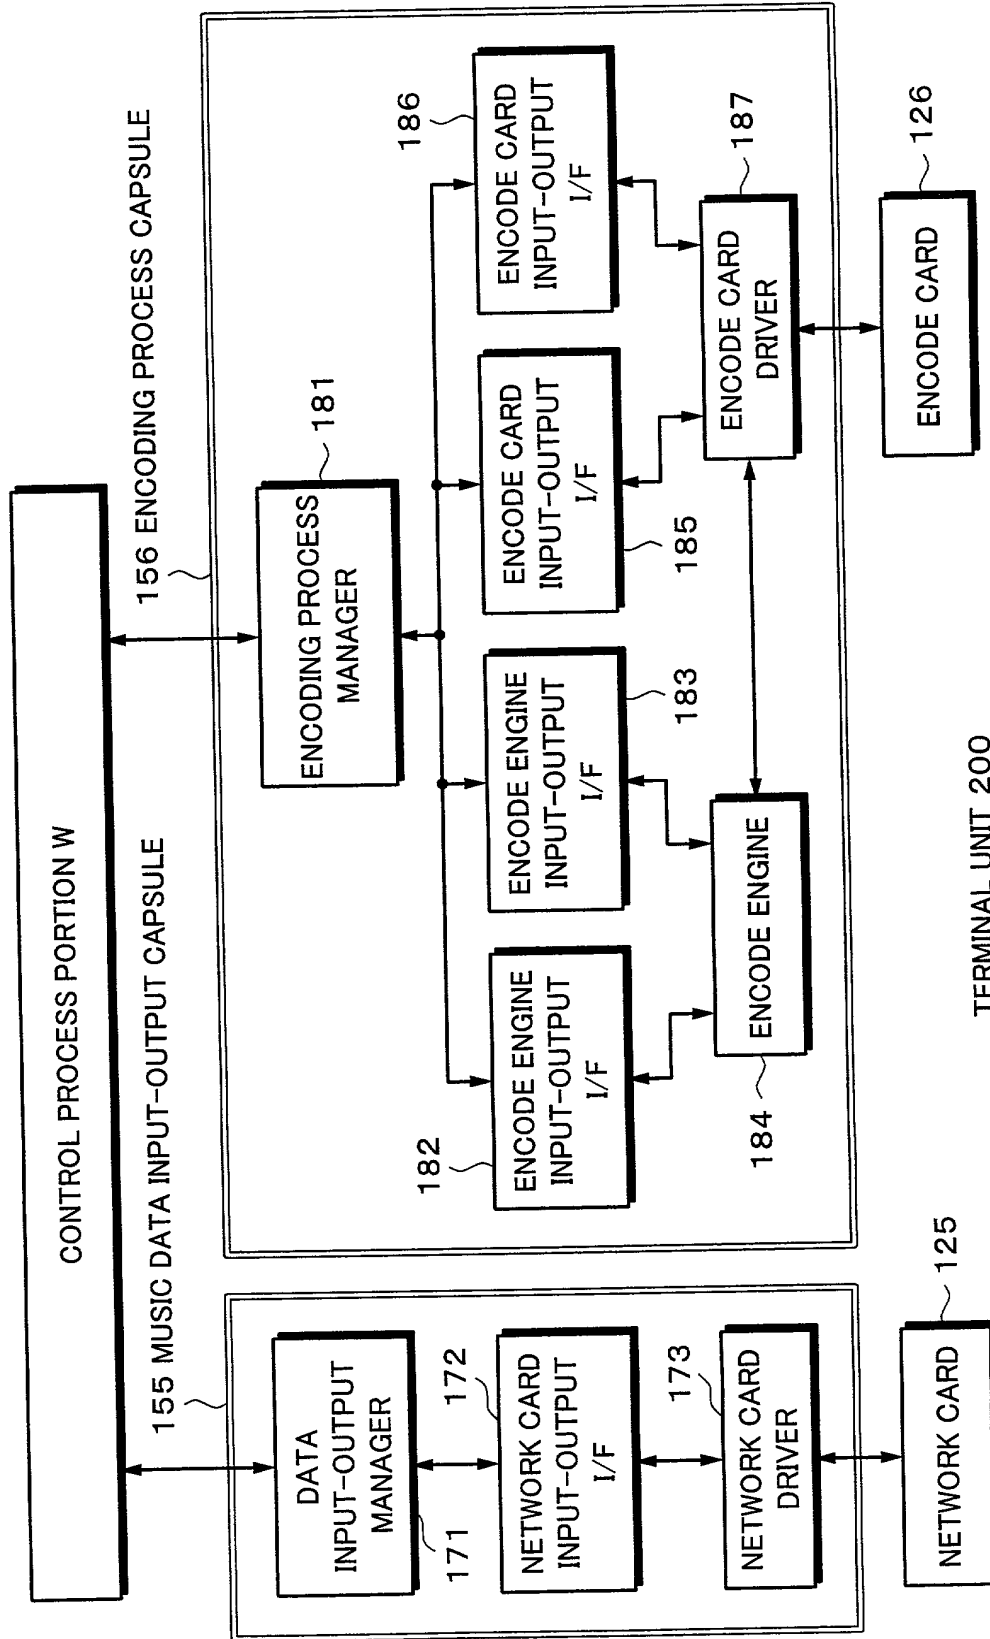
Fig. 19**MUSIC DELIVERY SERVICE SYSTEM**

Fig. 20



TERMINAL UNIT 200

Fig. 21



151 ... CAPSULE MANAGER
152 ... ENCODING PROCESS CONTROLLING APPLICATION
153 ... MAIN APPLICATION
154 ... CONTROL DATA INPUT - OUTPUT CAPSULE
155 ... MUSIC DATA INPUT - OUTPUT CAPSULE
156 ... ENCODING PROCESS CAPSULE
161 ... ENCODING PROCESS CONTROLLING MANGER
162 ... NETWORK CARD INPUT I/F PROCESS
163 ... NETWORK CARD OUTPUT I/F
164 ... NETWORK CARD DRIVER
171 ... DATA INPUT - OUTPUT MANAGER
172 ... NETWORK CARD INPUT - OUTPUT I/F
173 ... NETWORK CARD DRIVER
181 ... ENCODING PROCESS MANAGER
182 ... ENCODE ENGINE INPUT - OUTPUT I/F
183 ... ENCODE ENGINE INPUT - OUTPUT I/F
184 ... ENCODE ENGINE
185 ... ENCODE CARD INPUT - OUTPUT I/F
186 ... ENCODE CARD INPUT - OUTPUT I/F
187 ... ENCODE CARD DRIVER

500 P1309 US00

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name:

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

STORAGE MEDIUM, INFORMATION PROCESSING APPARATUS, AND METHOD

the specification of which is attached hereto unless the following box is checked:

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない：

☒ was filed on 27 October 2000
as United States Application Number of
PCT International Application Number PCT/JP00/07549
_____ and was amended on
_____ (if applicable).

☐ _____ の日に出願され、
この出願の米国出願番号または PCT 国際出願番号は、
_____ であり、且つ
_____ の日に補正された出願（該当する場合）

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

私は、連邦規則法典第 37 編規則 1.56 に定義されている、特許性について重要な情報を開示する義務があることを認める。

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the need of the individual case. Any comments on the amount of time you are required to complete this form should be sent to Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

日本語宣言書

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一国を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

Prior Foreign Application(s)

外国での先行出願

11-308673 Japan
(Number) (Country)
(番号) (国名)

29 October 1999
(Day/Month/Year Filed)

Priority Not Claimed

優先権主張なし

☐

11-308674 Japan
(Number) (Country)
(番号) (国名)

29 October 1999
(Day/Month/Year Filed)

☐

2000-325218 Japan
(Number) (Country)
(番号) (国名)

25 October 2000
(Day/Month/Year Filed)

☐

2000-325219 Japan
(Number) (Country)
(番号) (国名)

25 October 2000
(Day/Month/Year Filed)

☐

PCT/JP00/07549 PCT
(Number) (Country)
(番号) (国名)

27 October 2000
(Day/Month/Year Filed)

☐

 (Country)
(Number) (国名)
(番号)

(Day/Month/Year Filed)

☐

私は、ここに、下記のいかなる米国仮特許出願についても、その米国法典第35編119条(e)項の利益を主張する。

(Application No.) (Filing Date)
(出願番号) (出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が、米国法典第35編第112条第1段に規定された態様で、先行する米国出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に関わる重要な情報について開示義務があることを承認する。

(Application No.) (Filing Date)
(出願番号) (出願日)

私は、ここに表明された私自身の知識に係わる陳述が真実であり、且つ情報と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に関与することを理解した上で陳述が行われたことを、ここに宣言する。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application for which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (Filing Date)
(出願番号) (出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

日本語宣言書

委任状： 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び/または弁理士を任命する。(氏名及び整理番号を記載すること)

書類送付先

直通電話連絡先：(氏名及び電話番号)

唯一または第一発明者氏名

発明者の署名

日付

住所

国籍

郵便の宛先

第二共同発明者がいる場合、その氏名

第二共同発明者の署名

日付

住所

国籍

郵便の宛先

(第三以下の共同発明者についても同様に記載し、署名をすること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

WILLIAM S. FROMMER, Registration No. 25,506 and
DENNIS M. SMID, Registration No. 34,930

Send Correspondence to:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct Telephone Calls to: (212) 588-0800

To the attention of: WILLIAM S. FROMMER

Full name of sole or first inventor

Takeshi IWATSU

inventor's signature

Date

Residence

Saitama, Japan

Citizenship

Japan

Post Office Address:

Sony Corporation
7-35 Kitashinagawa 6-Chome
Shinagawa-Ku, Tokyo 141, Japan

full name of second joint inventor, if any

Second Inventor's signature

Date

Residence

Citizenship

Post Office Address

Sony Corporation
7-35 Kitashinagawa 6-Chome
Shinagawa-Ku, Tokyo 141, Japan

(Supply similar information and signature for third and subsequent joint inventors)

09/869658

JC18 Rec'd PCT/PTO 2 8 JUN 2001

Attorney Docket No. 450106-02804

New Patent Application filed **June 27, 2001**, entitled:

STORAGE MEDIUM, INFORMATION PROCESSING APPARATUS, AND METHOD

corresponding to PCT Application No. PCT/JP00/07549

filed October 27, 2000

Express Mail No.: EL742692451US

Date of Deposit: June 27, 2001

I hereby certify that this application and the accompanying papers are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:

Box PCT
Assistant Commissioner for Patents
Washington, D.C. 20231.

Charles Jackson